

NCP81295 Evaluation Board User's Manual

EVBUM2956/D

This user manual is intended to assist those using the NCP81295 Evaluation Board. It will provide useful tips and procedures for powering up and using the Evaluation Board (EVB). It is intended as a quick-start guide rather than a comprehensive manual.

Description

The NCP81295 is a 12 V, 50 A Smart Fuse intended for high current applications. It offers a highly accurate current sensor and a low 0.65 mΩ integrated MOSFET to reduce solution size and minimize power loss. The printed circuit board assembly (PCBA) contains all the circuitry and connections necessary to evaluate the performance of the NCP81295 under various load and system conditions.

Features

Power Features

- Co-packaged Power Switch, Hotswap Controller and Current Sense
- Up to 60 A Peak Current Output, 50 A Continuous
- Vin Range: 4.5 V to 18 V
- 0.65 mΩ, no RSENSE Required

Control Features

- Enable Input
- Optional Enable-controlled Output Pulldown when Disabled
- Programmable Soft-Start
- Programmable, Multi-level Current Limit

Reporting Features

- Accurate Analog Load Current Monitor
- Programmable Over Current Alert Output
- Analog Temperature Output

- Status Fault OK Output

Other Features

- 5 mm x 5 mm QFN32 Package
- Operating Temperature: -40 °C to 125 °C
- Can be Paralleled for Higher Current Applications
- Built-in Insertion Delay for Hotswap Applications
- NCP81295: Latch off for Following Protection Features
- NCP81296: Auto-Retry Mode for Following Protection Features
 - ◆ Current-limit after Delay
 - ◆ Fast Short-circuit Protection
 - ◆ Over-Temperature Shutdown
 - ◆ Excessive Soft-start Duration
- Internal Switch Fault Diagnostics
- Low-power Auxiliary Output Voltage

Quick Start Connection Guide

1. Connect a Power supply and Eload to Vin and Vout, respectively.
 2. Connect a multimeter to GOK Pin under the "TopIC" section of the EVB.
 3. Set power supply to 12 V.
 4. Enable the device through the Enable Switch (SW1) by moving the switch to the 'ON' position.
 5. Monitor Eload and Multimeter, 12 V and 5 V should be seen, respectively. The GOK LED will also be lit up now.
 6. Set Eload to 5 A.
 7. Monitor Eload and confirm that 12 V and 5 A are on the output of EVB.
 8. Turn Eload off, then switch Enable Switch (SW1) to 'OFF' position, and set Power Supply off.*
- * Must be done in this sequence to properly disable the EVB.

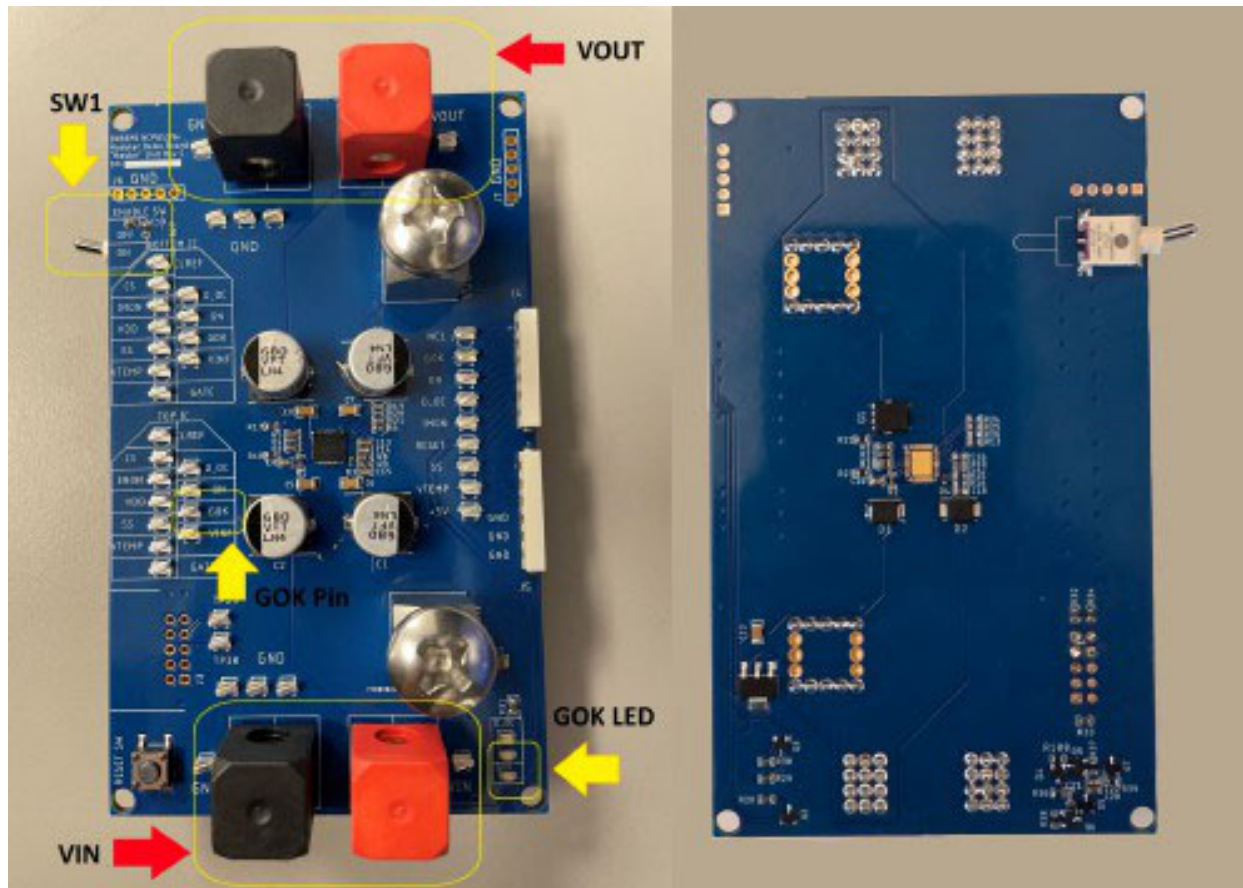


Figure 1. Top and Bottom of the NCP81295 Evaluation Board

SCHEMATIC FOR THE NCP81295GEVB EVALUATION BOARD

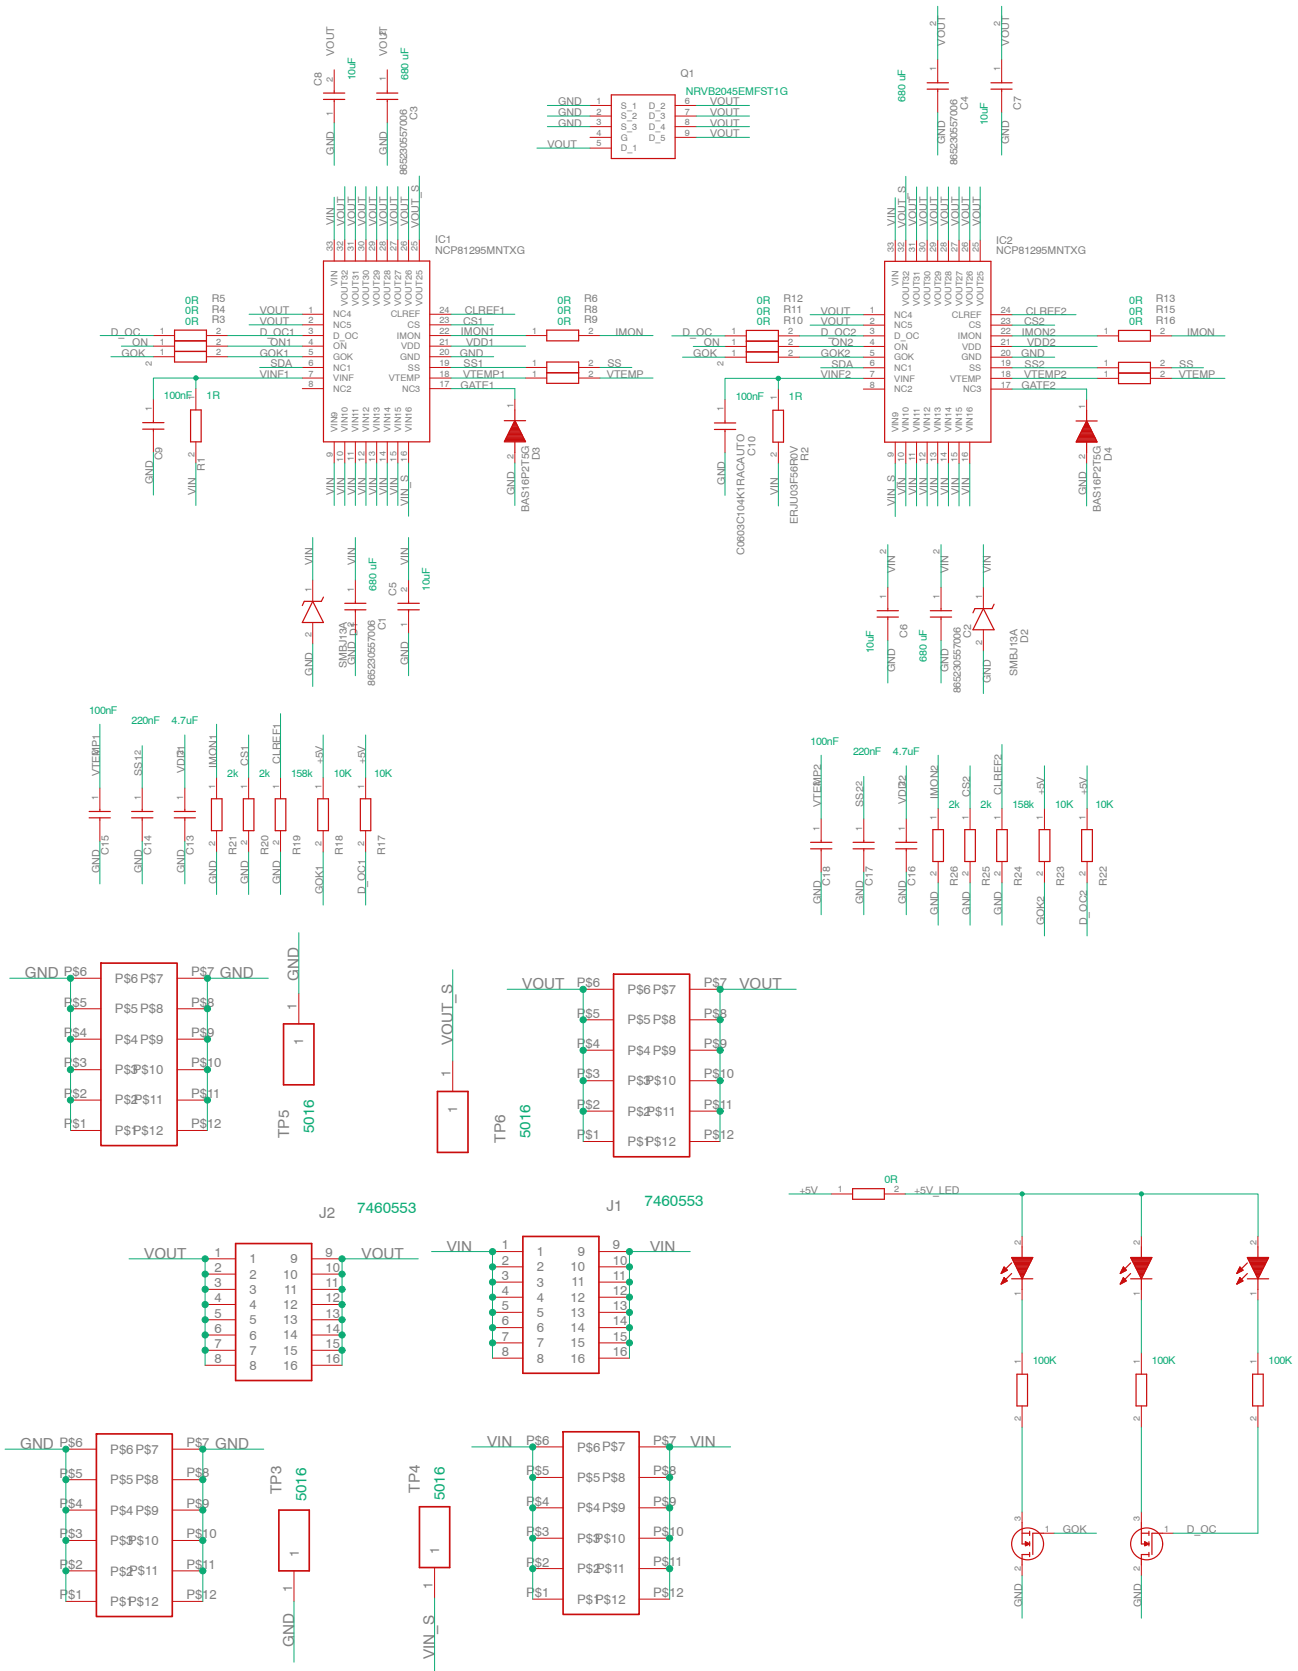


Figure 2. NCP81295GEVB Evaluation Board Schematic, Part 1

EVBUM2956/D

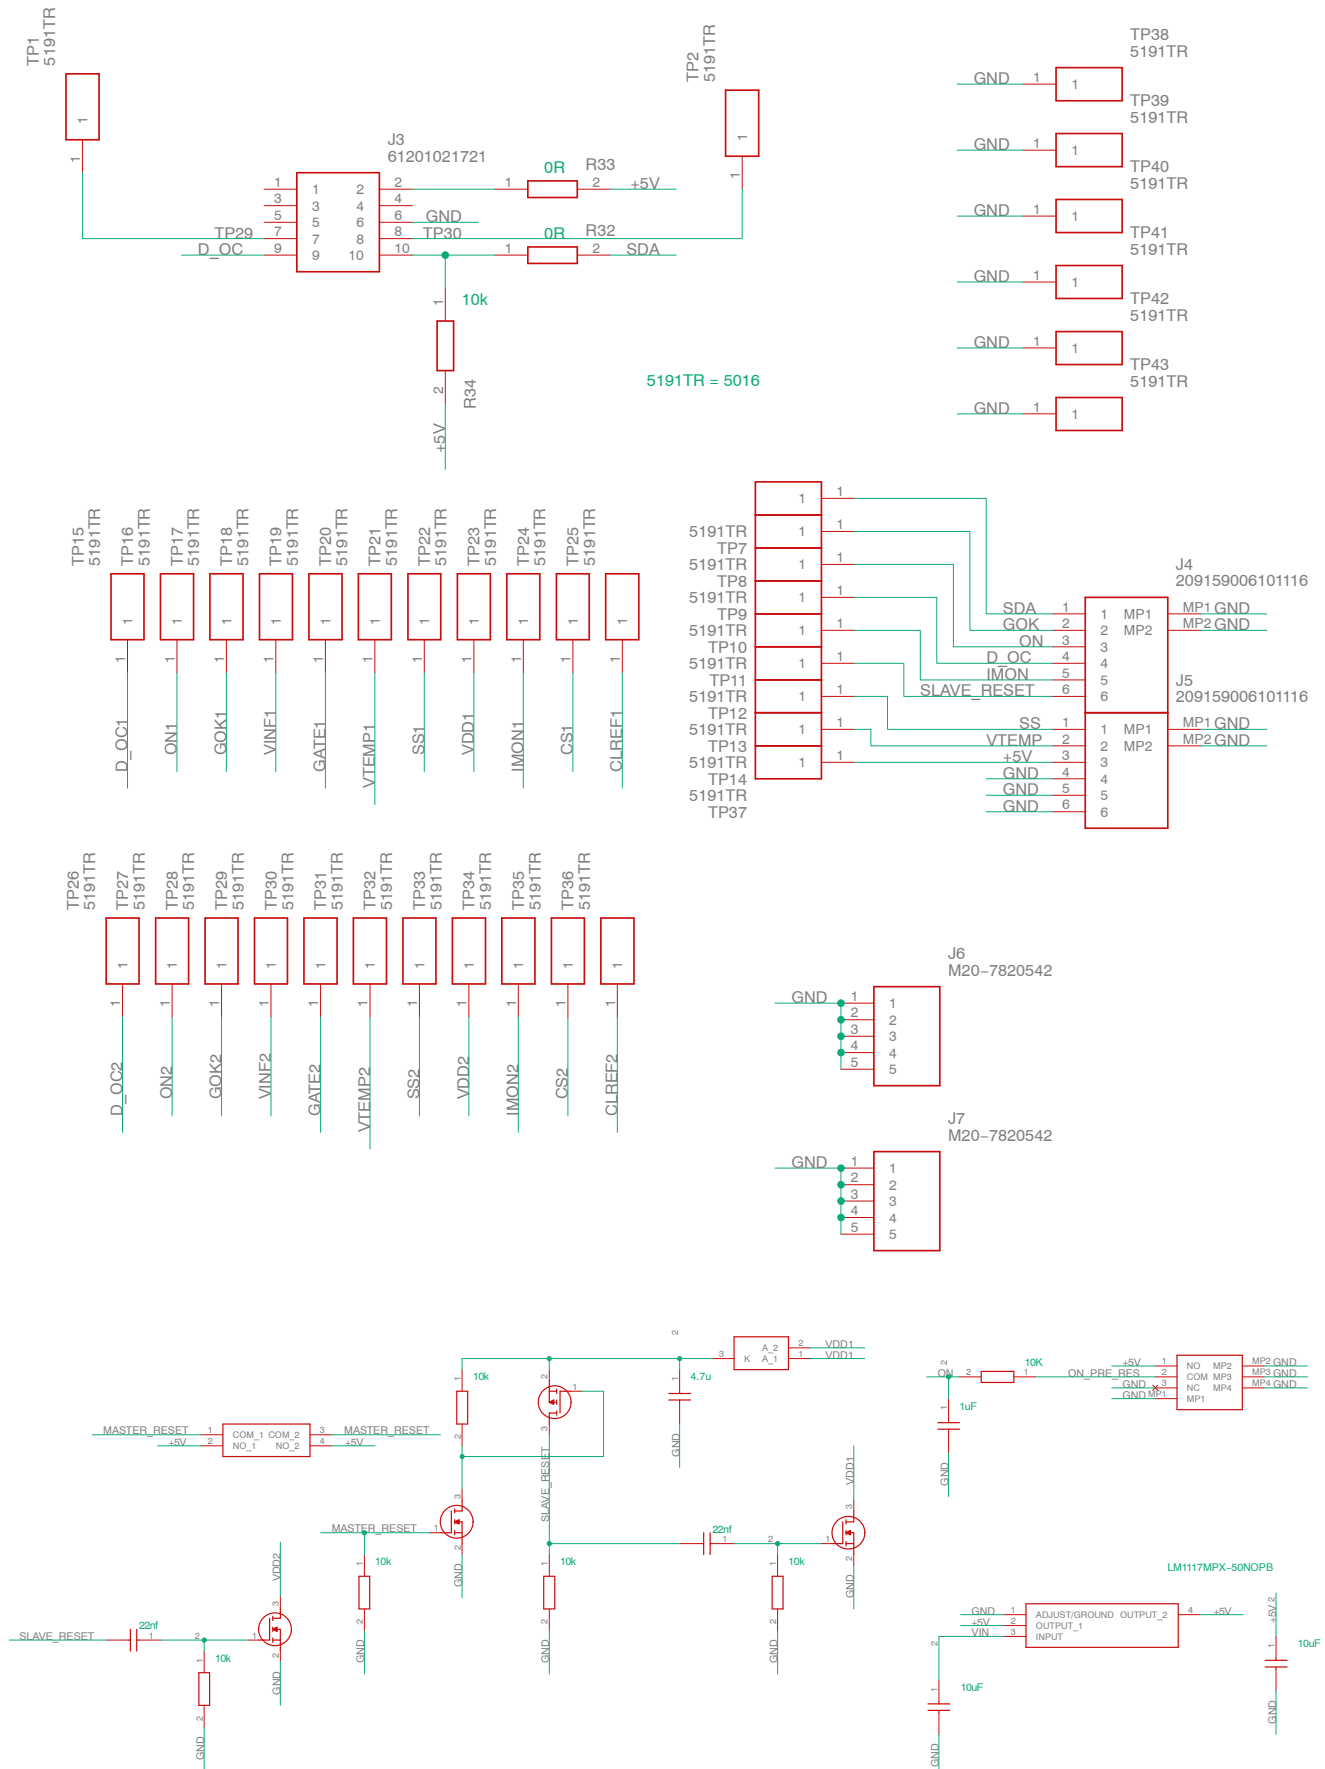


Figure 3. NCP81295GEVB Evaluation Board Schematic, Part 2

EVBUM2956/D

BILL OF MATERIALS

NCP81295GEVB MASTER BOM

Designator	Quantity	Value	Footprint	Manufacture #	Part Number	Substitution Allowed?
IC1, IC2	2	N/A	QFN-32	onsemi	NCP81295MNTXG	NO
D3, D4	2	N/A	SOD-923	onsemi	BAS16P2T5G	NO
Q1	1	N/A	SO-8 FL	onsemi	NRVB2045EMFST1G	NO
D1, D2	2	N/A	DO-214AA	Littlefuse	SMBJ13A	NO
Q5, Q6, Q7	3	N/A	TO-236-3	onsemi	NTR3C21NZT1G	NO
Q4	1	N/A	TO-236-3	onsemi	NTR1P02LT1G	NO
D5	1	N/A	SOT-23	Vishay	BAT54C-G3-08	NO
Q2, Q3	2	N/A	SOT-23	onsemi	2N7002LT1	NO
IC3	1	N/A	SOT223	onsemi	LM1117MPX-50NOPB	NO
S1	1	N/A	-	C&K Components	ET01MD1SAPE	NO
S2	1	N/A	-	Würth Elektronik	430182043816	NO
C1, C2, C3, C4	4	680 μ F, 35 V	0.406" L x 0.406" W (10.30 mm x 10.30 mm)	Panasonic	EEE-FT1V681UP	YES
C5, C6, C7, C8, C11, C12	6	10 μ F, 35 V	805	-	-	YES
R3, R4, R5, R6, R8, R9, R10, R11, R12, R13, R15, R16, R31, R32, R33	15	0 Ω	603	-	-	YES
R1, R2	2	1 Ω	603	-	-	YES
R20, R21, R25, R26	4	2 k Ω , 0.05%	603	-	-	YES
R17, R18, R22, R23, R27, R34, R36, R37, R38, R100	10	10 k Ω	603	-	-	YES
R28, R29, R30	3	100 k Ω	603	-	-	YES
R19, R24	2	158 k Ω	603	-	-	YES
C21, C22	2	22 nF	603	-	-	YES
C9, C10, C15, C18	4	100 nF	603	-	-	YES
C14, C17	2	220 nF	603	-	-	YES
C19	1	1 μ F	603	-	-	YES
C13, C16, C20	3	4.7 μ F	603	-	-	YES
LED1, LED2	2	N/A	805	Würth Elektronik	150080GS75000	YES
LED3	1	N/A	805	Würth Elektronik	150080RS75000	YES
VIN Connector	1	N/A	-	Würth Elektronik	7464000	NO
VOUT Connector	1	N/A	-	Würth Elektronik	7464000	NO
GND connector	2	N/A	-	Würth Elektronik	7464100	NO
J1, J2	2	N/A	-	Würth Elektronik	7461059	NO
TP1, TP2, TP3, TP4, TP5, TP6, TP7, TP8, TP9, TP10, TP11, TP12, TP13, TP14, TP15, TP16, TP17, TP18, TP19, TP20, TP21, TP22, TP23, TP24, TP25, TP26, TP27, TP28, TP29, TP30, TP31, TP32, TP33, TP34, TP35, TP36, TP37	37	N/A	-	Keystone Electronics	5197TR	NO
J4, J5	2	N/A	-	Kyocera AVX	209159006101116	NO
J6, J7	2	N/A	-	Harwin	M20-7820542	YES
J3	1	N/A	-	Würth Elektronik	61201021721	NO

EVBUM2956/D

REVISION HISTORY

Revision	Description of Changes	Date
P0	Initial document release.	5/20/2026

onsemi, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales