

# 40 W SiC High-Voltage Auxiliary Power Supply for HEV & BEV Applications Evaluation Board User's Manual

## SECO-HVDCDC1362-40W-GEVB

### Introduction

SECO-HVDCDC1362-40W-GEVB is highly efficient and primary-side regulated (PSR) auxiliary power supply targeting HEV and EV automotive power trains. The design provides a stable 15 V output and 40 W over a wide input DC voltage range from 250 V to 900 V, and is therefore suitable for 400 V and 800 V battery systems.

The board employs the NCV1362 quasi-resonant peak current PSR flyback controller, the 3-lead cost-optimized NVHL160N120SC1 160 m $\Omega$  1200 V silicon carbide (SiC) MOSFET, and the FFSP0665B-F085 SiC diode.

Thanks to the high blocking voltage capabilities and ultra-low gate charge (34 nC) value of the SiC FET, the switching losses are significantly reduced, and the board exhibits a superior efficiency for the application up to 86% in low line input conditions. The notable driving capabilities of the NCV1362 controller allows for direct operation of the SiC FET at 12 V without a pre-driver, simplifying the layout and cutting down the component count.

The flyback transformer provides 4 kV isolation and is optimized to minimize the losses on the RCD snubber. Consequently the system effectively dampens the drain voltage overshoot at high line, and provides 100 V margin for the SiC FET. The board is fully realized with automotive qualified semiconductors and passive devices. Industrial grade replacements are also available.

### Features

- NCV1362 (Automotive) / NCP1362 (Industrial) Quasi-resonant Peak Current PSR Flyback Controller
- Fully Automotive Qualified Devices
- $V_{in}$  = 240 V – 900 V DC Only
- $V_{out}$  = 15 V / 40 W Continuous
- Electromagnetic Compatibility (EN 55015 Limits)
- High Efficiency up to 85.5%
- SiC FET Directly Operated at 12 V by the IC
- Excellent Thermal Performance

### Applications

- HEV & EV Vehicles Auxiliary Power Supplies
- Automotive Powertrain Systems
- EV Charging and DC–DC Conversion
- Industrial DC–DC Conversion, Solar Inverts (with Industrial Grade)



(Top View)



(Bottom View)

**Figure 1. Board Layout**

### Benefits

- Superior Efficiency with SiC Devices
- Stable Performance across a Wide Input Voltage Range (250 Vdc – 900 Vdc)
- Reduced Bill-of-Material and Cost-optimized
- Fully AEC-Q Qualified Parts
- EMC within EN 55015 Limits
- Single Layer PCB

### Collateral

- [NVHL160N120SC1](#)
- [NCV1362](#)
- [SECO-HVDCDC1362-40W-GEVB](#)
- [References](#)

# SECO-HVDCDC1362-40W-GEVB

## Scope and Purpose

The purpose of this user's manual is to present the design of an auxiliary power supply with automotive qualified parts NCV1362 (NCP1362) and NVHL160N120SC1 SiC FET. The design was tested as described in this document but not

qualified regarding safety requirements or manufacturing and operation over the complete operating temperature range or lifetime. The hardware is intended for testing under laboratory conditions and by trained specialists only.

## System Overview

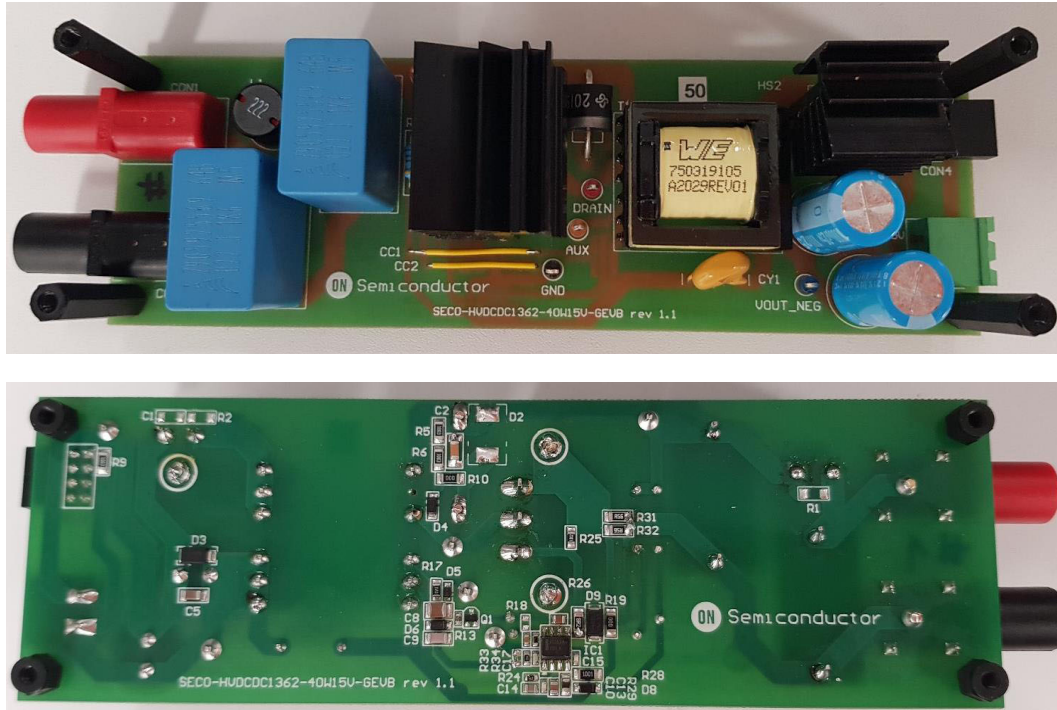


Figure 2. Evaluation Board Photo

## Block Diagram

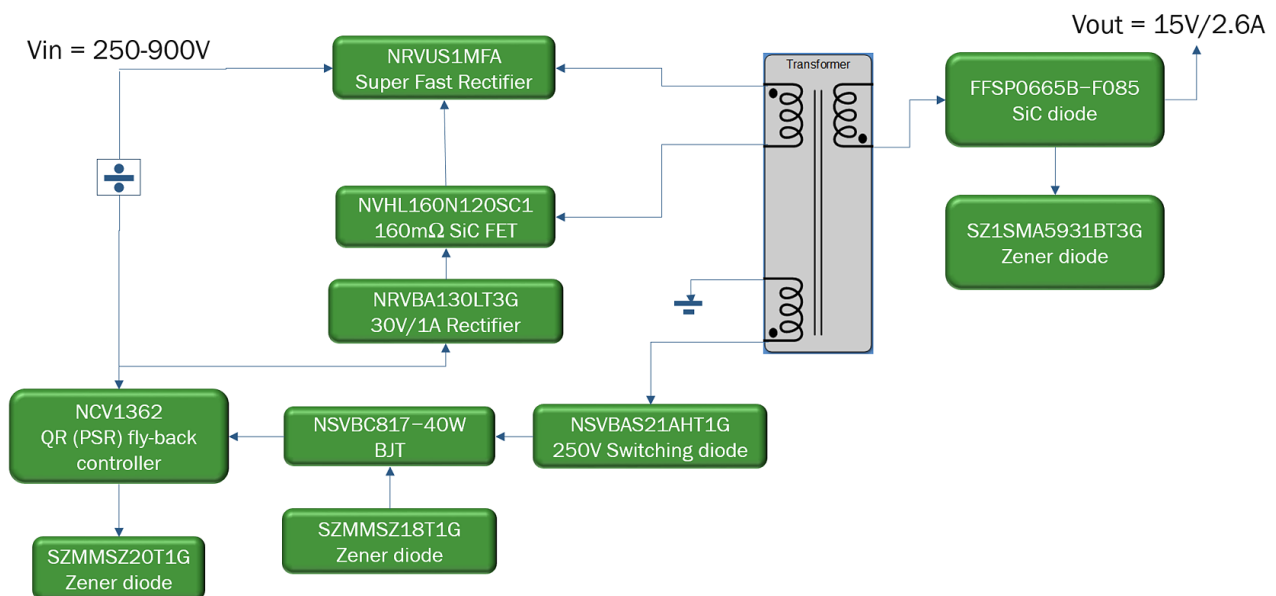


Figure 3. Block Diagram

# SECO-HVDCDC1362-40W-GEVB

## SPECIFICATION

| Parameters                                                                         | Values                                                                                                |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>Input</b>                                                                       |                                                                                                       |
| Voltage                                                                            | 250–900 VDC                                                                                           |
| Current                                                                            | 191 mA ( $V_{in} = 250\text{ V}$ ), 56 mA ( $V_{in} = 900\text{ V}$ )                                 |
| <b>Output</b>                                                                      |                                                                                                       |
| Power                                                                              | 40 W                                                                                                  |
| Voltage                                                                            | 15 VDC                                                                                                |
| Current per branch                                                                 | 2.66 A                                                                                                |
| Total current                                                                      | 2.66 A                                                                                                |
| Efficiency at full load                                                            | 85.5% ( $V_{in} = 250\text{ V}$ )                                                                     |
| Temperature at full load                                                           | 98 °C ( $V_{in} = 6\text{ V}$ ), 74.5 °C ( $V_{in} = 15\text{ V}$ ), 76 °C ( $V_{in} = 18\text{ V}$ ) |
| <b>Control</b>                                                                     |                                                                                                       |
| Core part                                                                          | NCV1362                                                                                               |
| Topology                                                                           | Flyback                                                                                               |
| Switching frequency                                                                | 50 kHz                                                                                                |
| Operation mode                                                                     | DCM                                                                                                   |
| Primary side peak current                                                          | 1.5 A                                                                                                 |
| <b>Construction</b>                                                                |                                                                                                       |
| Board size                                                                         | 52.2 x 164.2 x 40 mm                                                                                  |
| <b>Transformer</b>                                                                 |                                                                                                       |
| Dielectric insulation                                                              | 4000 VAC, 1 min.                                                                                      |
| Inductance                                                                         | 0.95 mH $\pm$ 10%                                                                                     |
| Leakage inductance                                                                 | 20 $\mu$ H typ. / 40 $\mu$ H max.                                                                     |
| Safety standard                                                                    | IEC62368-1                                                                                            |
| Pollution degree                                                                   | 1                                                                                                     |
| <b>Application</b>                                                                 |                                                                                                       |
| HEV & EV vehicles, automotive powertrain systems, EV charging and DC–DC conversion |                                                                                                       |

# SECO-HVDCDC1362-40W-GEVB

## Schematic

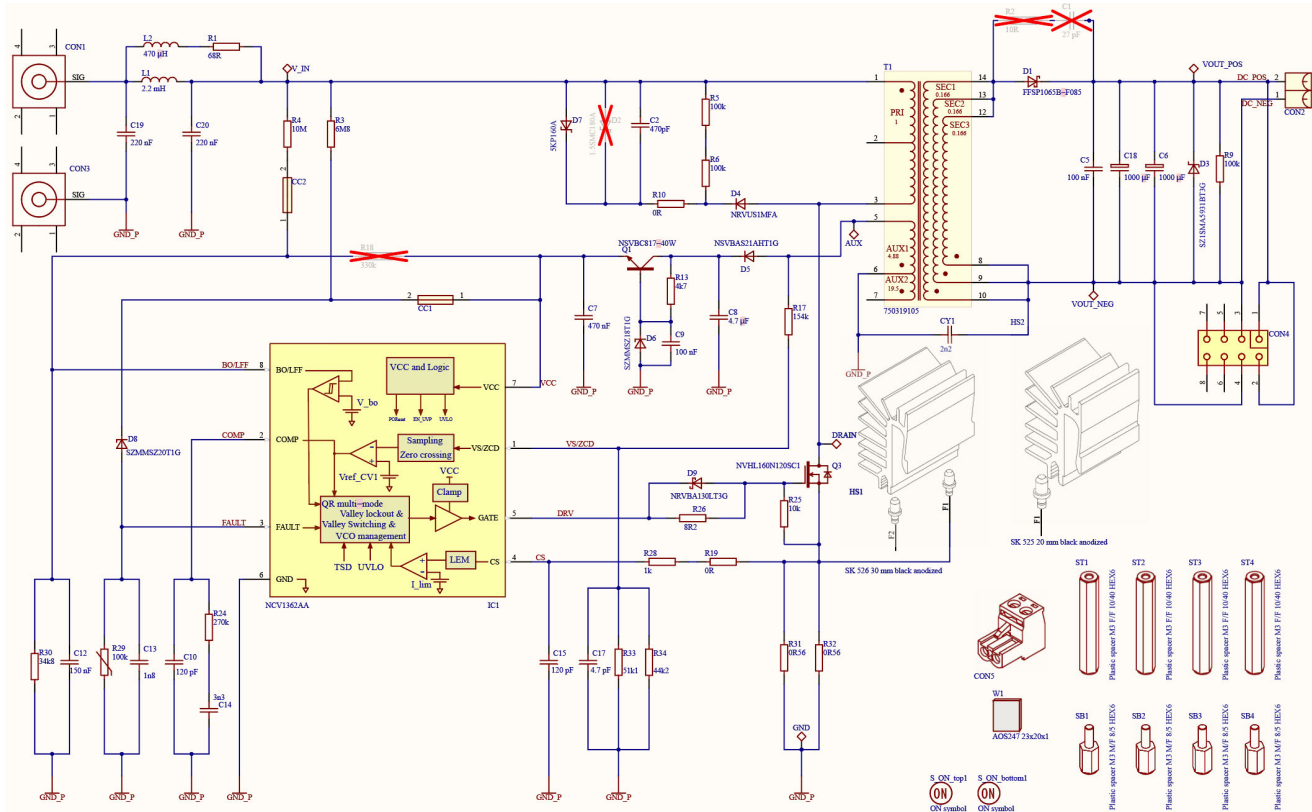


Figure 4. Evaluation Board Schematic

## TEST REPORT

This section presents the results of the tests conducted on the power supply.

- Efficiency DC/DC at input voltage range and full load
- Waveforms at 240 V, 500 V, 900 V at full load / open circuit
- Load transients 15%–85% and 15%–85% load
- Thermal camera view
- Electromagnetic compatibility

### Efficiency DC/DC at Input Voltage Range and Full Load


Measured conditions:

- Output power  $P_{out} \sim 40$  W
- Electronic load: Chroma 6147A used channel 3 as CRH (constant resistance high mode  $5.5 \Omega \rightarrow 2.66 \text{ A}$ )

List of equipment:

- DC source: Magna-Power 0–1000V
- Power analyzer: Textronix PA3000
- Electronic load: Chroma

### Efficiency 40W HV Auxiliary

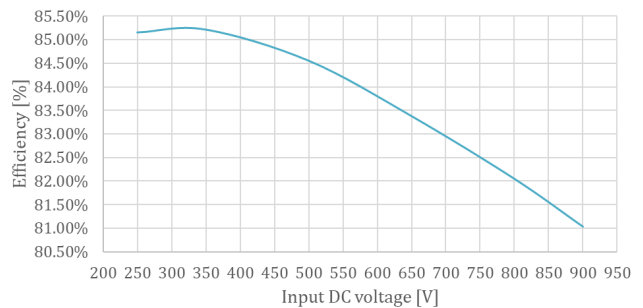

### Power losses 40W HV Auxiliary

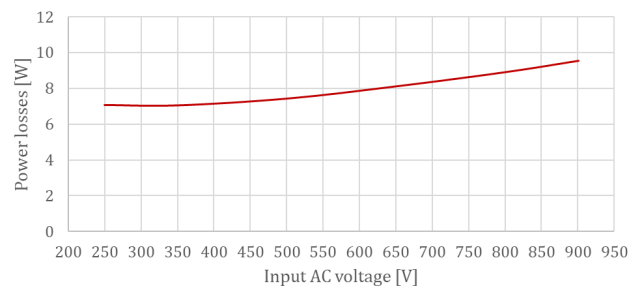


Figure 5.

# SECO-HVDCDC1362-40W-GEVB

## Waveforms at 240 V, 500 V, 900 V at Full Load / Open Circuit

### Measured conditions:

- Output power  $P_{out} \sim 40$  W
- Electronic load: Chroma 6147A used channel 3 as CRH (constant resistance high mode  $5.5 \Omega \rightarrow 2.66 \text{ A}$ )

### List of equipment:

- DC source: Magna-Power 0–1000V
- Power analyzer: Textronix PA3000
- Electronic load: Chroma
- Oscilloscope: Lecroy HDO8038

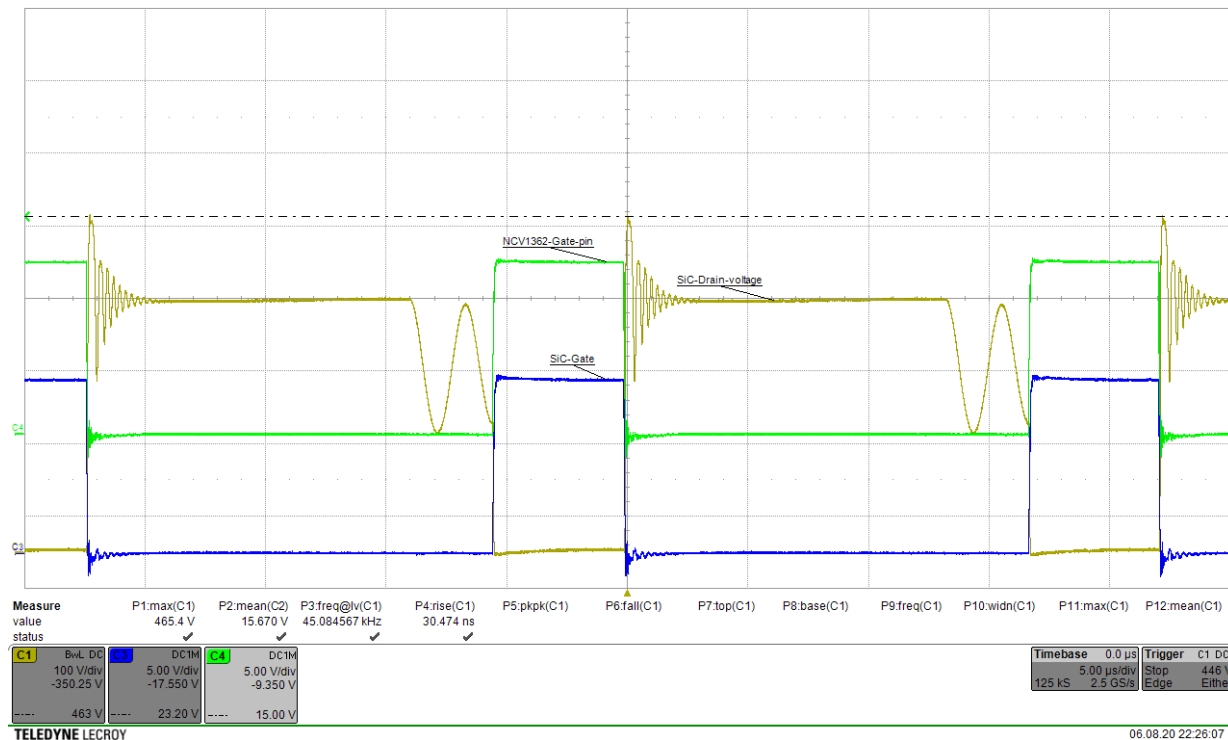


Figure 6. 250 V DC Full Load

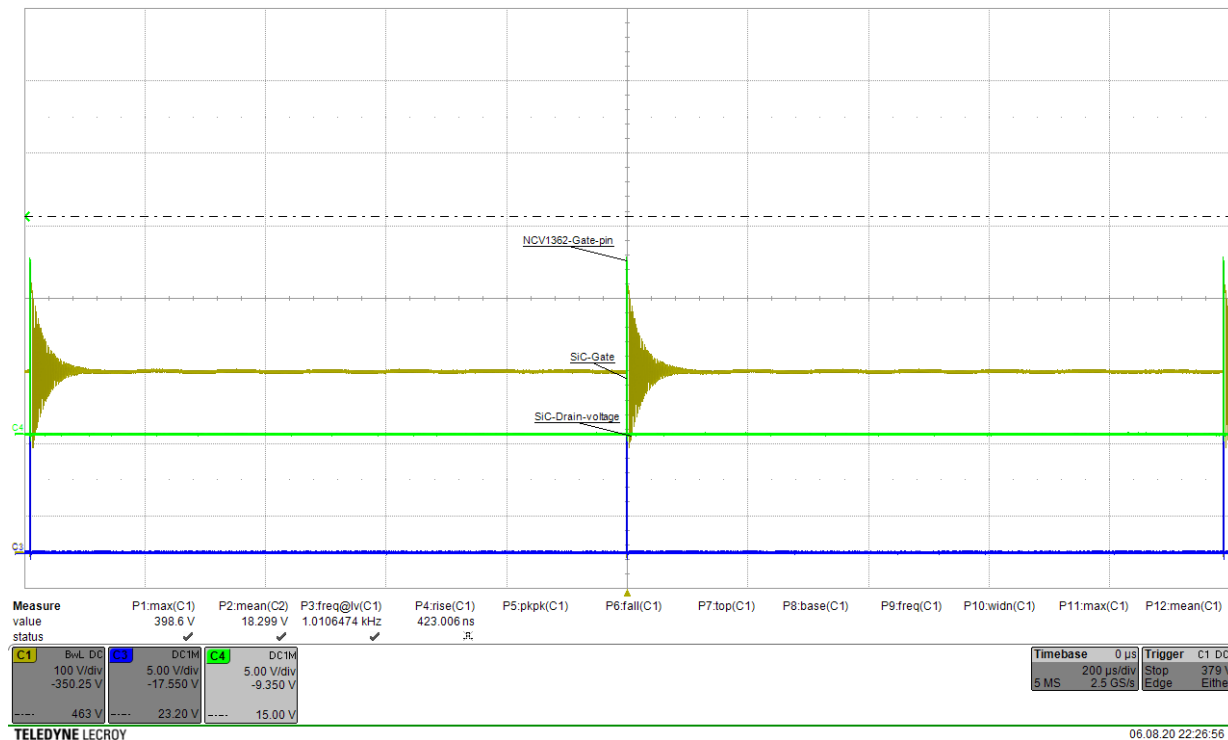


Figure 7. 250 V DC Open Circuit

# SECO-HVDCDC1362-40W-GEVB

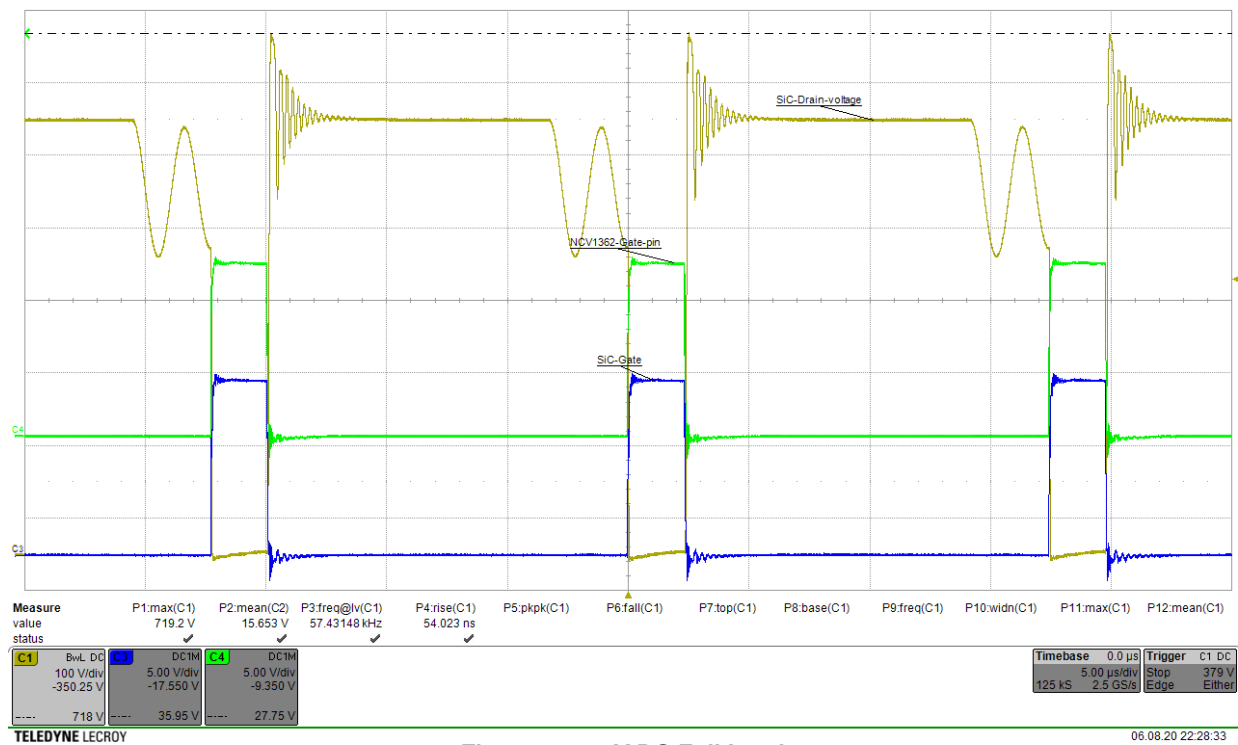


Figure 8. 500 V DC Full Load

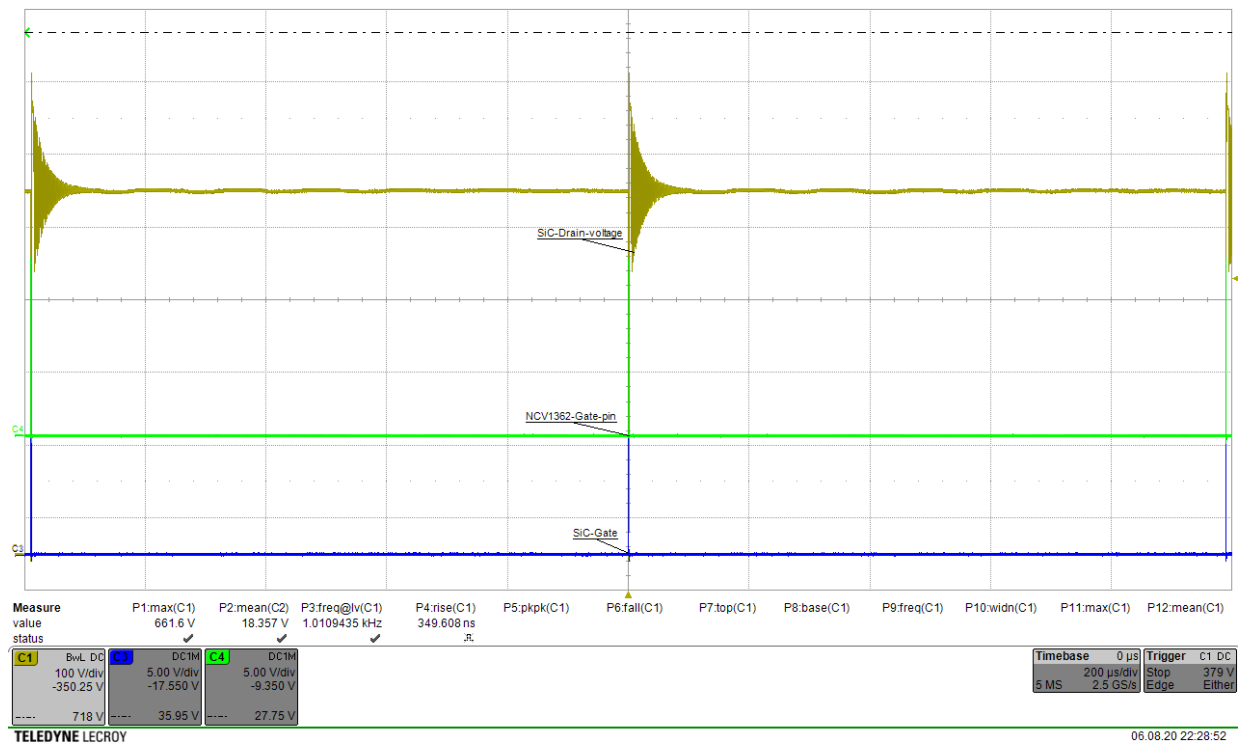


Figure 9. 500 V DC Open Circuit

# SECO-HVDCDC1362-40W-GEVB

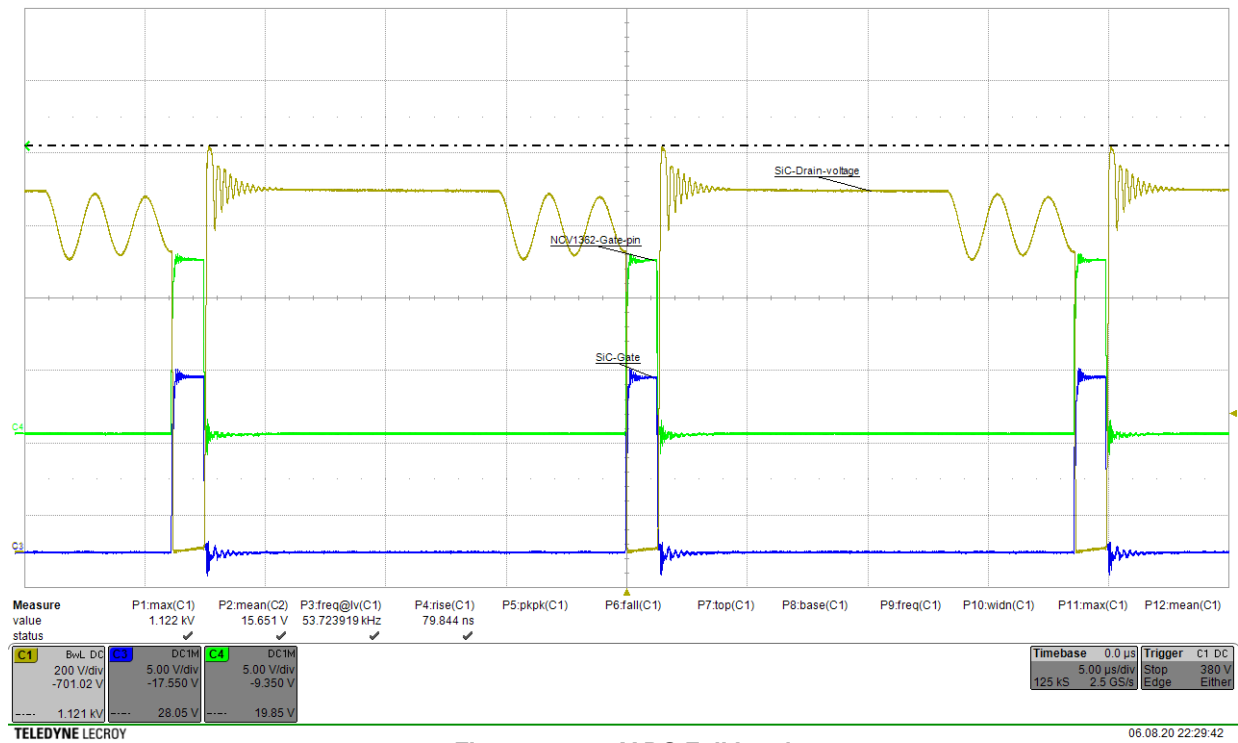


Figure 10. 900 V DC Full Load

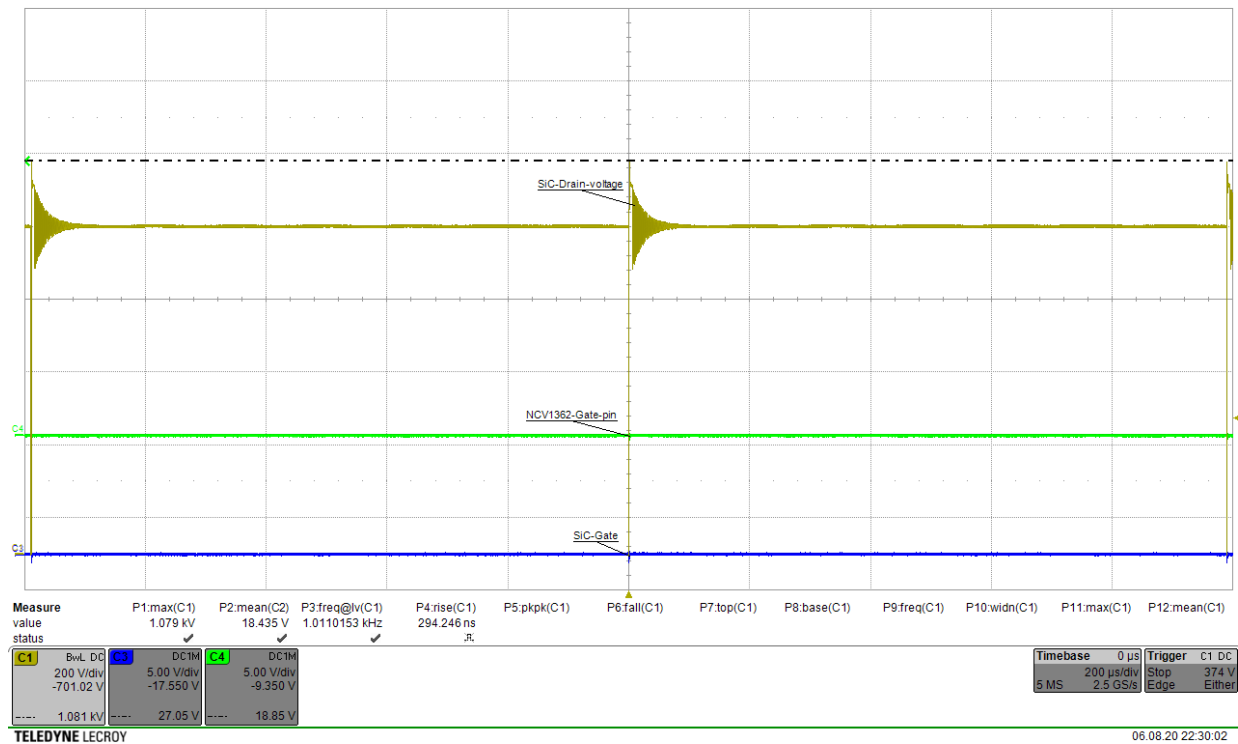


Figure 11. 900 V DC Open Circuit

# SECO-HVDCDC1362-40W-GEVB

## Load Transients 15%–85% and 15%–85% Load

Measured conditions:

- Output power  $P_{out} \sim 40\text{ W}$
- Electronic load: Chroma 6147A used channel 3 as CCDH (constant current dynamic mode  $0.39\text{ A} \rightarrow 2.26\text{ A}$ )

List of equipment:

- DC source: Magna-Power 0–1000V
- Power analyzer: Textronix PA3000
- Electronic load: Chroma
- Oscilloscope: Lecroy HDO8038

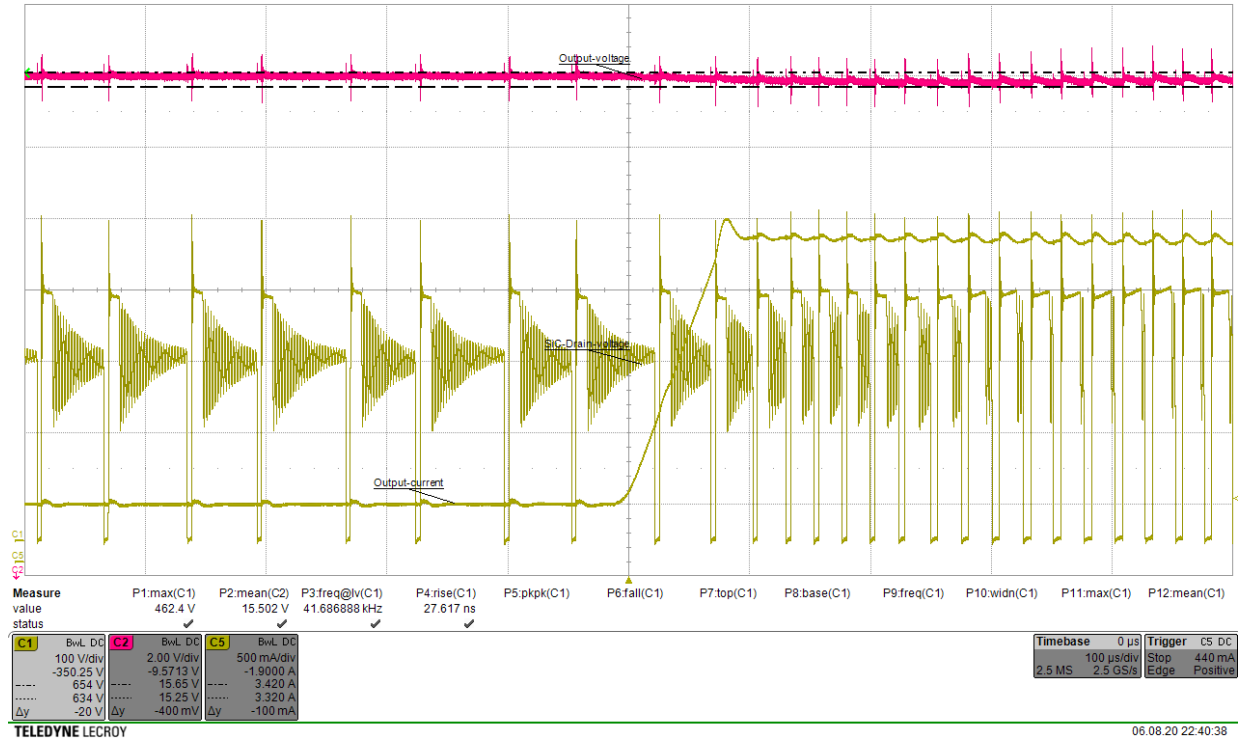


Figure 12. 250 V – 15% to 85%

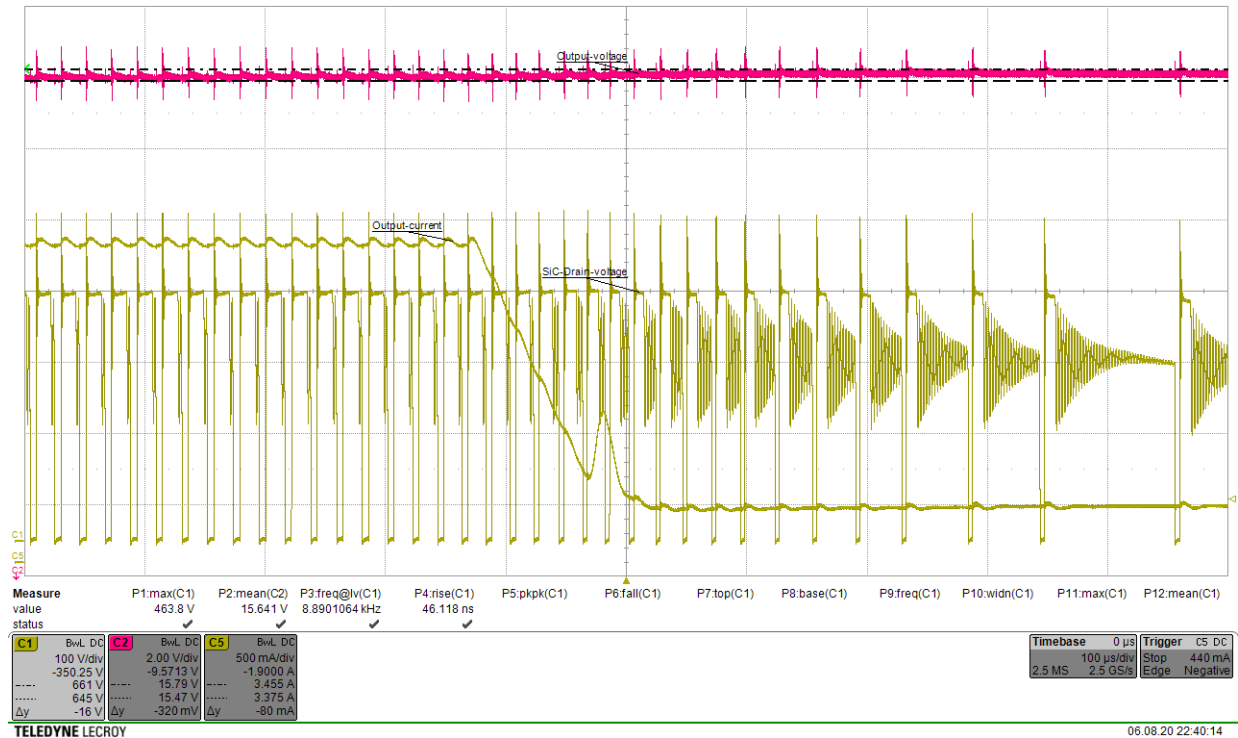


Figure 13. 250 V – 85% to 15%

# SECO-HVDCDC1362-40W-GEVB

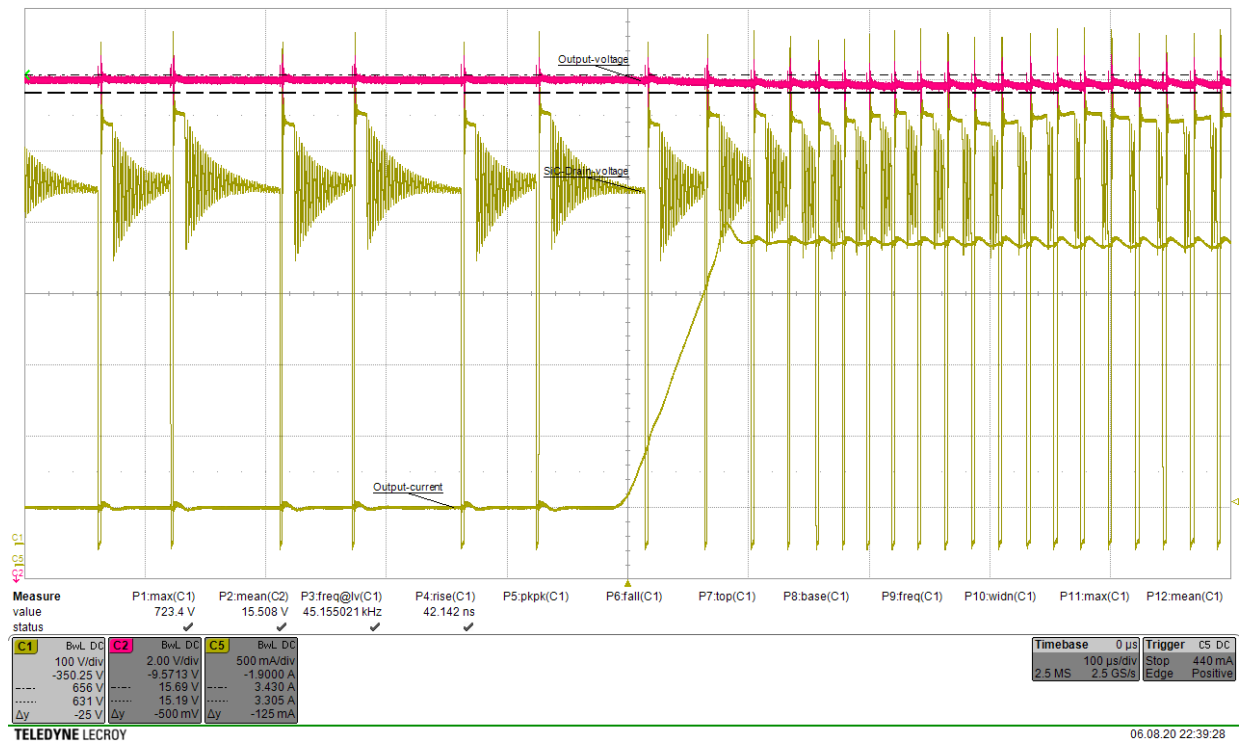


Figure 14. 500 V – 15% to 85%

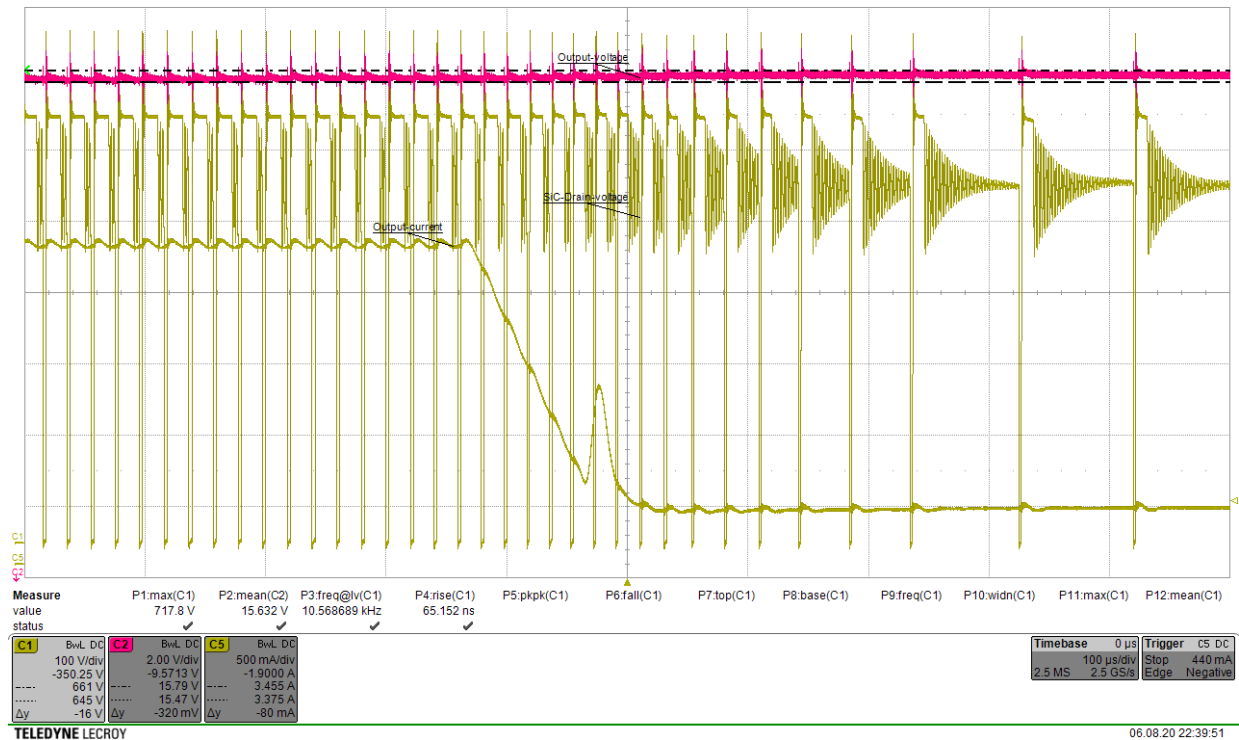


Figure 15. 500 V – 85% to 15%

# SECO-HVDCDC1362-40W-GEVB

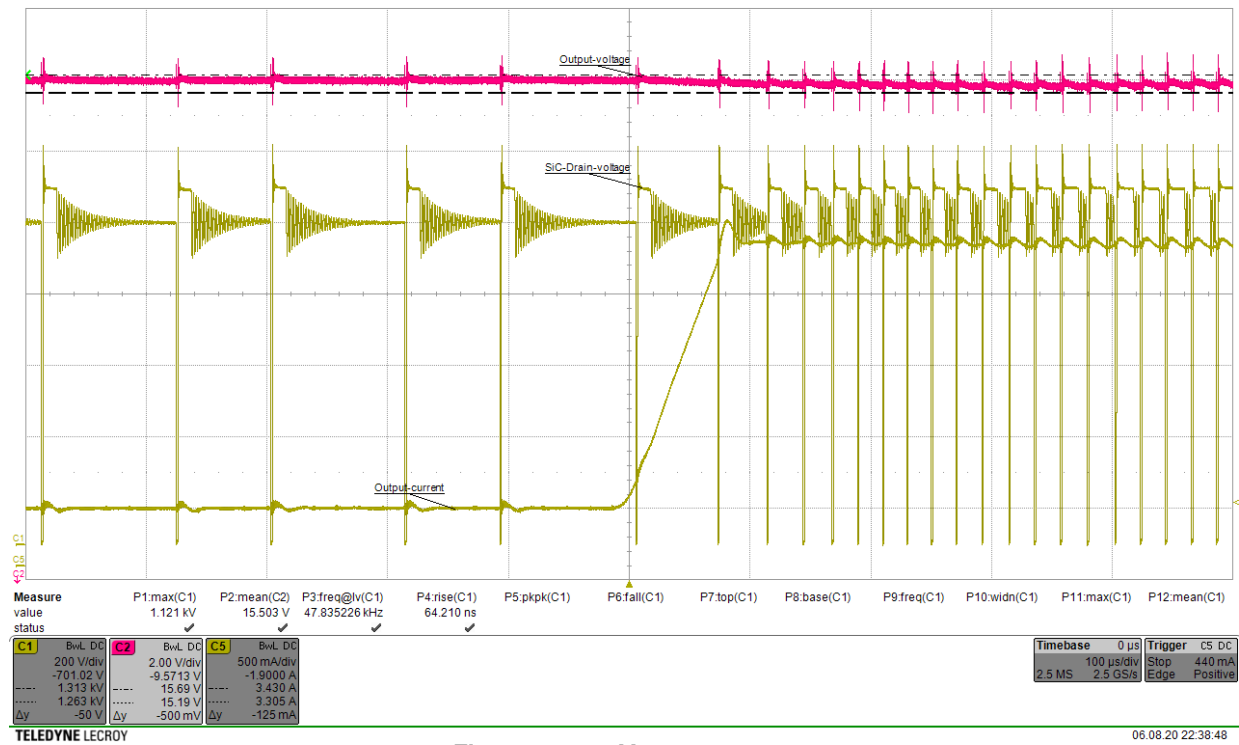


Figure 16. 900 V – 15% to 85%

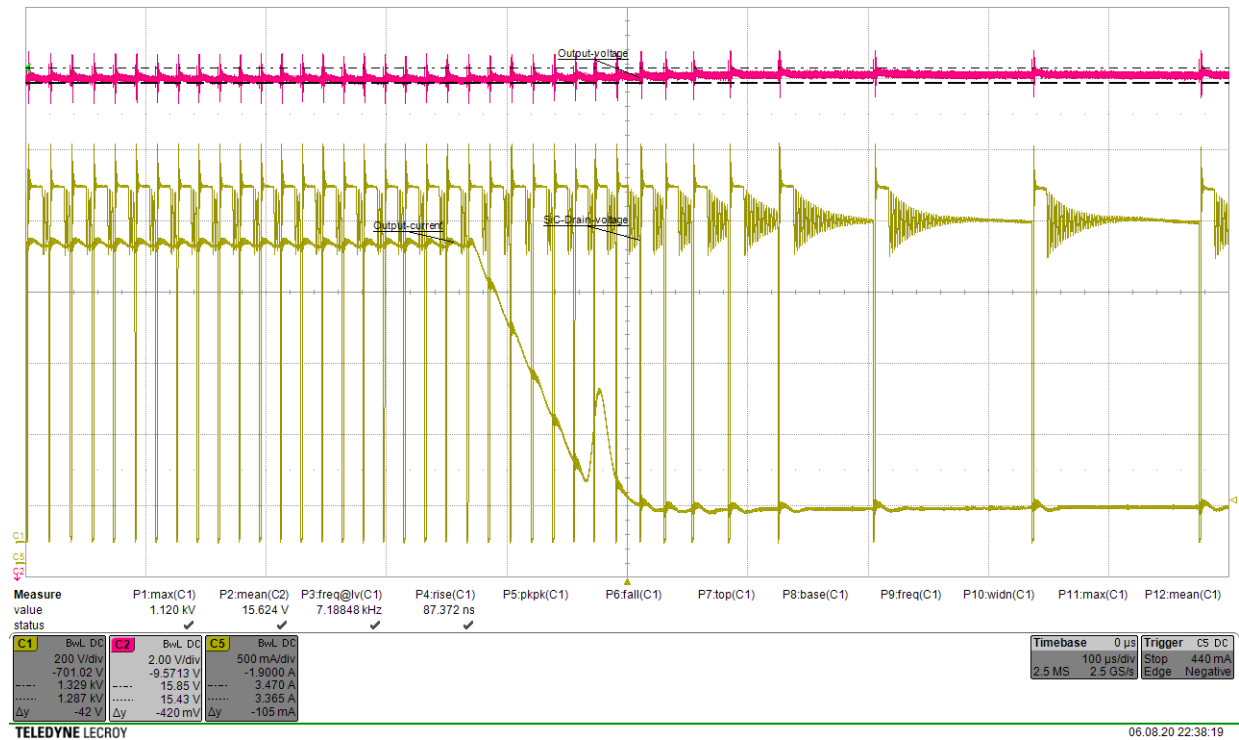



Figure 17. 900 V – 85% to 15%

## SECO-HVDCDC1362-40W-GEVB


### Thermal Camera View

Measured conditions:

- Output power  $P_{out} \sim 40\text{ W}$
- Electronic load: Chroma 6147A used channel 3 as CRH (constant resistance high mode  $5.5\ \Omega \rightarrow 2.66\text{ A}$ )
- Input voltage  $\sim 900\text{ V DC}$
- After 5 minutes in this conditions

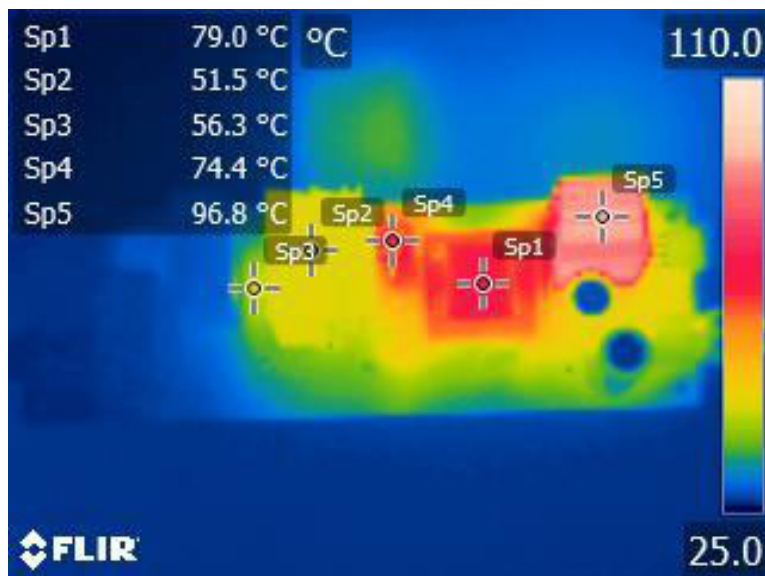

Sp1 – Transformer  
 Sp2 – SiC switcher heatsink  
 Sp3 – Startup high voltage resistor  
 Sp4 – Axial TVS diode  
 Sp5 – Secondary rectifier heatsink

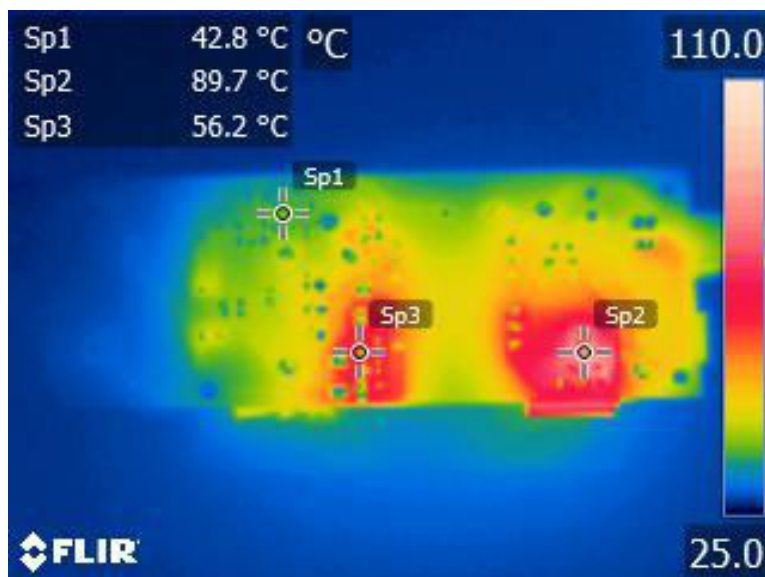


Sp1 – IC NCV 1362  
 Sp2 – Secondary rectifier heatsink bottom  
 Sp3 – Axial TVS diode bottom side

Figure 18.


## SECO-HVDCDC1362-40W-GEVB

Measured conditions:

- Output power  $P_{out} \sim 40\text{ W}$
- Electronic load: Chroma 6147A used channel 3 as CRH (constant resistance high mode  $5.5\ \Omega \rightarrow 2.66\text{ A}$ )
- Input voltage  $\sim 250\text{ V DC}$
- After 5 minutes in this conditions

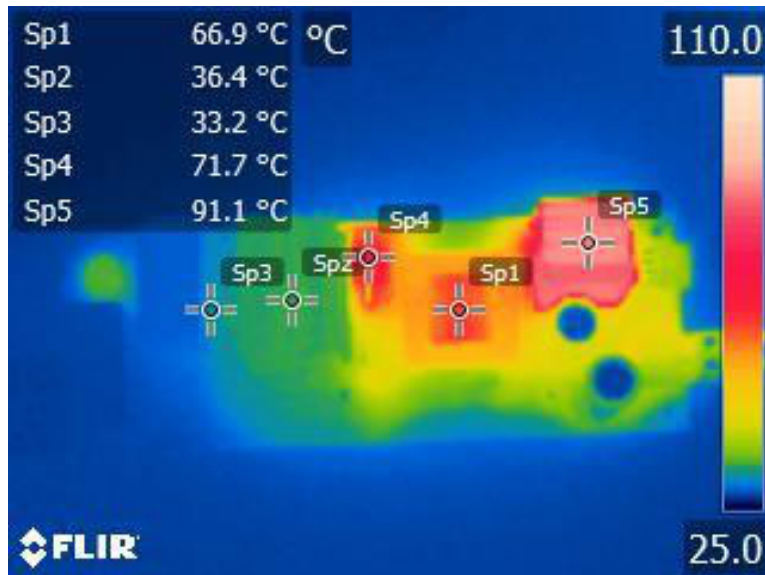

Sp1 – Transformer  
 Sp2 – SiC switcher heatsink  
 Sp3 – Startup high voltage resistor  
 Sp4 – Axial TVS diode  
 Sp5 – Secondary rectifier heatsink

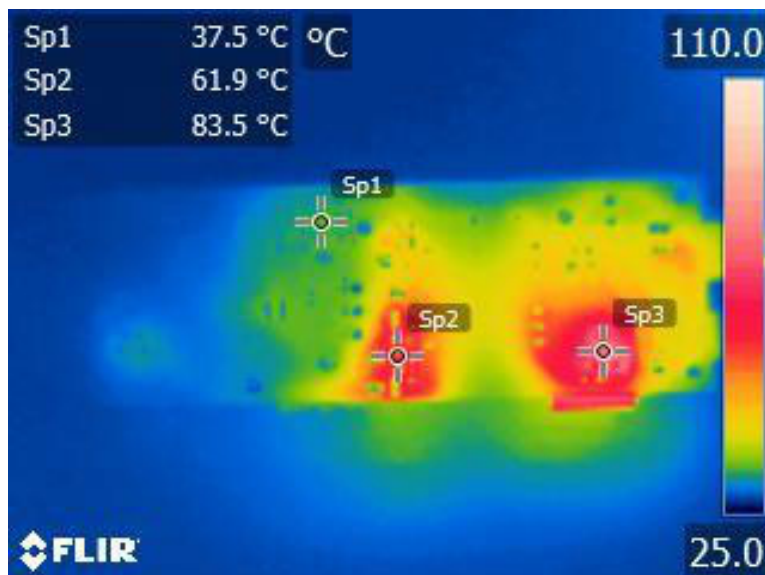

Sp1 – IC NCV 1362  
 Sp2 – Secondary rectifier heatsink bottom  
 Sp3 – Axial TVS diode bottom side

Figure 19.

# SECO-HVDCDC1362-40W-GEVB

## Electromagnetic Compatibility – Conducted Emissions EN55015 Limits

Measured conditions:

- Output power  $P_{out} \sim 18 \text{ W}$  resistive load
- Input voltage  $\sim 250 \text{ V}$

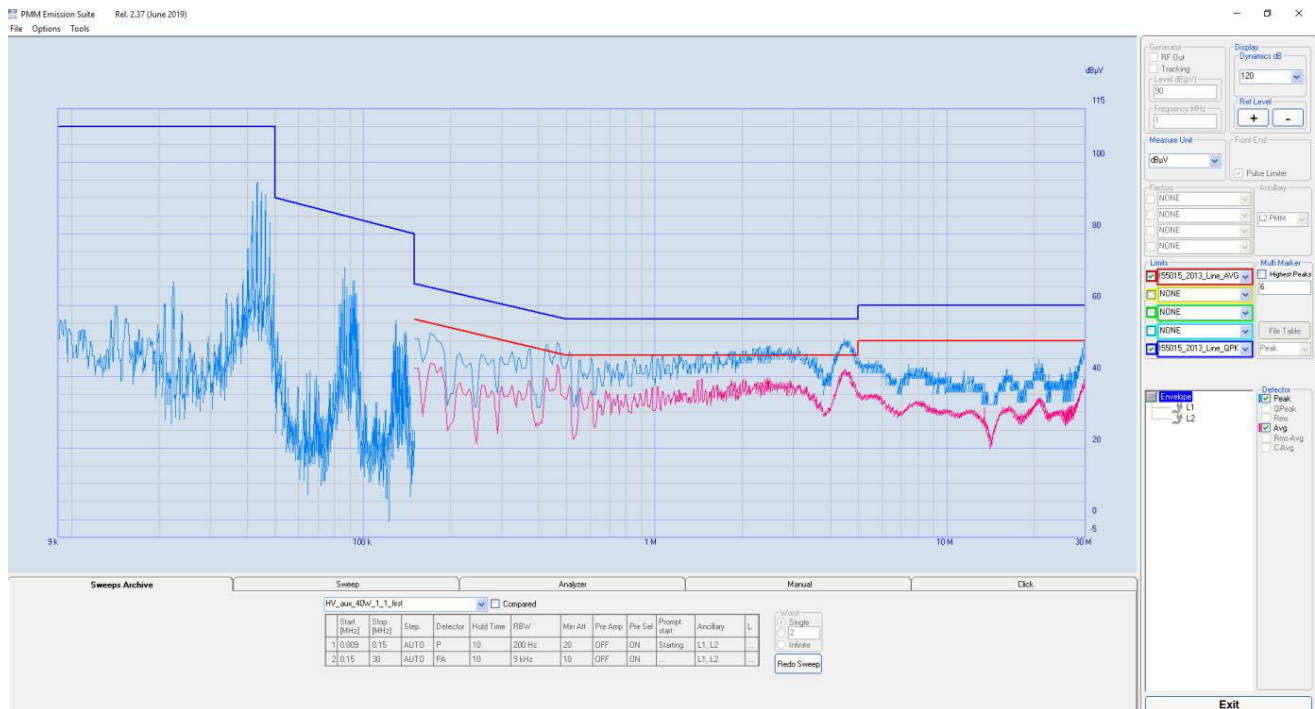


Figure 20.

# SECO-HVDCDC1362-40W-GEVB

## Transformer Design

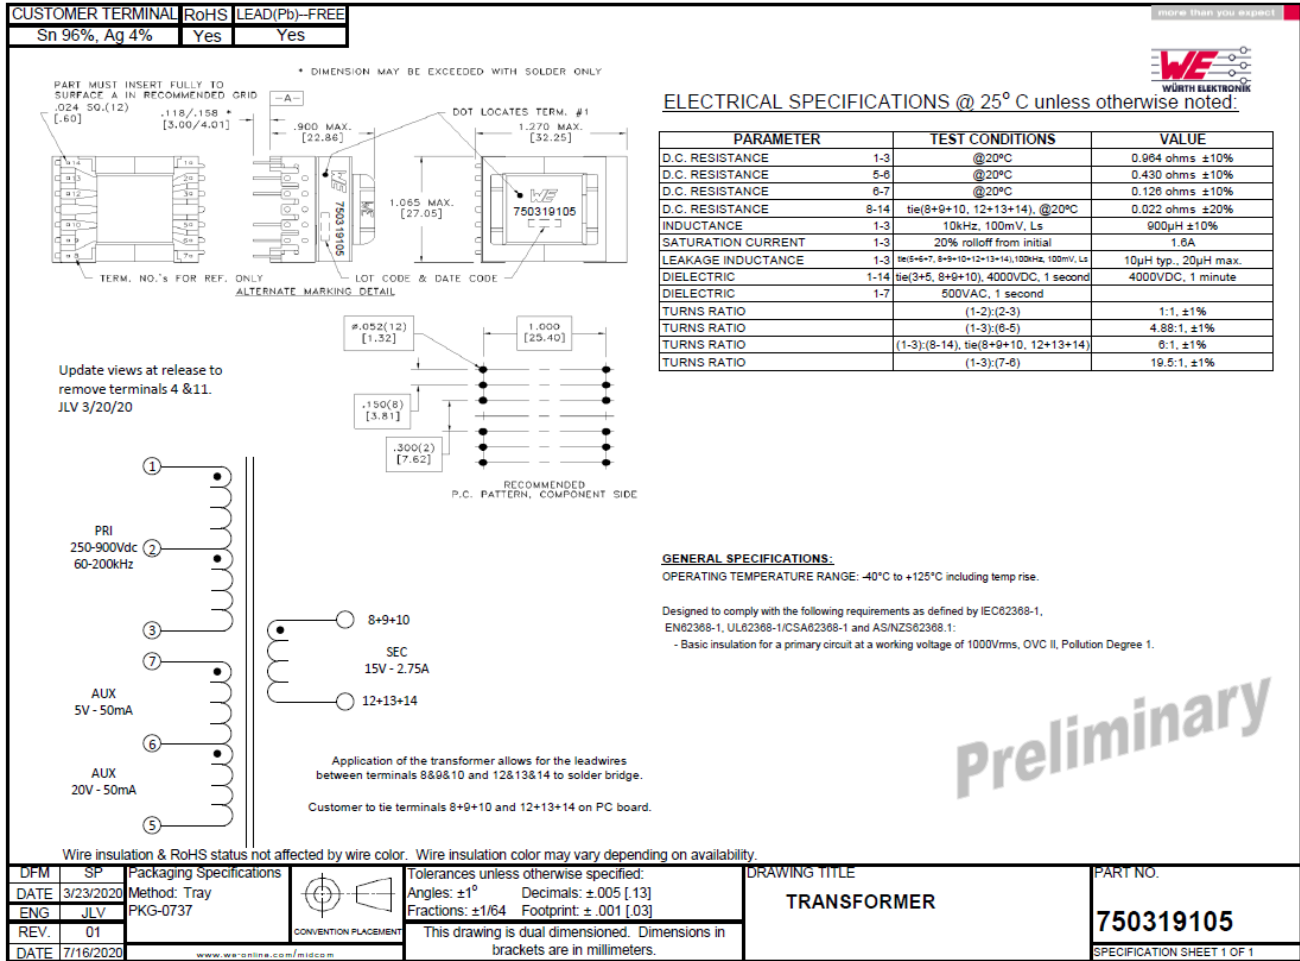


Figure 21. Drawing and Parameters of Used Transformer

## SECO-HVDCDC1362-40W-GEVB

### Development Resources and Tools

Collateral, development files and other development resources listed below are available at [SECO-HVDCDC1362-40W-GEVB](http://www.onsemi.com/SECO-HVDCDC1362-40W-GEVB)

- Schematics
- BOM (below as well)
- Manufacturing files
- PCB layout (below as well)
- Source files
- Simulation model (below as well)

**Table 1. BILL OF MATERIALS**

| #   | Designator | Comment                     | Description                                                                                         |
|-----|------------|-----------------------------|-----------------------------------------------------------------------------------------------------|
| 1.  | C2         | 470 pF                      | MLC capacitor 470pF 1kV $\pm 10\%$ X7R Würth Elektronik                                             |
| 2.  | C5         | 100 nF                      | Multilayer Ceramic Capacitors MLCC – SMD 1206 25 V 100 nF C0G $\pm 1\%$ AEC–Q202 –55 – 125 °C       |
| 3.  | C6, C18    | 1000 $\mu$ F                | ALU electrolyte high current ripple 1000 $\mu$ F 25V 20% Nichicon                                   |
| 4.  | C7         | 470 nF                      | Multilayer Ceramic Capacitors MLCC – SMD 0805 50 V 470 nF X7R $\pm 10\%$ AEC–Q202 –55 – 125 °C      |
| 5.  | C8         | 4.7 $\mu$ F                 | Multilayer Ceramic Capacitors MLCC – SMD 1210 50 V 4.7 $\mu$ F X7R $\pm 10\%$ AEC–Q202 –55 – 125 °C |
| 6.  | C9         | 100 nF                      | Multilayer Ceramic Capacitors MLCC – SMD 1206 50 V 100 nF C0G $\pm 5\%$ AEC–Q202 –55 – 125 °C       |
| 7.  | C10, C15   | 120 pF                      | Multilayer Ceramic Capacitors MLCC – SMD 0603 100 V 120 pF C0G $\pm 5\%$ AEC–Q202 –55 – 125 °C      |
| 8.  | C12        | 150 nF                      | Multilayer Ceramic Capacitors MLCC – SMD 0603 25 V 150 nF X7R $\pm 10\%$ AEC–Q202 –55 – 125 °C      |
| 9.  | C13        | 1n8                         | Multilayer Ceramic Capacitors MLCC – SMD 0805 100 V 1n8 C0G $\pm 5\%$ AEC–Q202 –55 – 125 °C         |
| 10. | C14        | 3n3                         | Multilayer Ceramic Capacitors MLCC – SMD 0805 100 V 3n3 C0G $\pm 5\%$ AEC–Q202 –55 – 125 °C         |
| 11. | C17        | 4.7 pF                      | Multilayer Ceramic Capacitors MLCC – SMD 0603 100 V 4.7 pF C0G $\pm 5\%$ AEC–Q200 –55 – 125 °C      |
| 12. | C19, C20   | 220 nF                      | MMKT film capacitor 220n 500Vac/1600Vdc TDK                                                         |
| 13. | CON1       | RED                         | Banana Test Connector, 4mm, Receptacle, PCB Mount, 24 A, 1 kV, Gold Plated Contacts, Red            |
| 14. | CON2       | 691 313 510 002             | PCB right angle connector 2 pins 5.08 mm pitch Würth Elektronik                                     |
| 15. | CON3       | BLACK                       | Banana Test Connector, 4mm, Receptacle, PCB Mount, 24 A, 1 kV, Gold Plated Contacts, Black          |
| 16. | CON4       | 613 008 243 121             | WR–PHD 2.54 mm Angled Dual Socket Header 2x4 pins                                                   |
| 17. | CON5       | 691 351 500 002             | Cable connector series 351 2pins 5.08 mm Würth Elektronik                                           |
| 18. | CY1        | 2n2                         | Disc ceramic capacitor 2n2 1500 VDC Y5U 10 % Vishay AEC–Q200                                        |
| 19. | D1         | FFSP1065B–F085              | Ultra fast Schottky SiC diode 650V 10A AEC–Q101 <b>onsemi</b>                                       |
| 20. | D3         | SZ1SMA5931BT3G              | TVS zener diode 18 V 83 mA SMA AEC–Q101 <b>onsemi</b>                                               |
| 21. | D4         | NRVUS1MFA                   | Super Fast diode 1000 V 1 A 75 ns SOD123FA AEC–Q101, <b>onsemi</b>                                  |
| 22. | D5         | NSVBAS21AHT1G               | Switching diode 250V 200mA SOD323 AEC–Q101 <b>onsemi</b>                                            |
| 23. | D6         | SZMMSZ18T1G                 | Zener Single Diode, 18 V, 500 mW, SOD–123, 5 %, 2 Pins, 150 °C, AEC–Q101                            |
| 24. | D7         | 5KP160A                     | TVS 160V 5000W True hole unidirectional VISHAY AEC–Q101                                             |
| 25. | D8         | SZMMSZ20T1G                 | Zener Diodes 20V 500mW SOD123 AEC–Q101 <b>onsemi</b>                                                |
| 26. | D9         | NRVBA130LT3G                | Schottky diode 30 V 1 A SMA <b>onsemi</b>                                                           |
| 27. | HS1        | SK 526 30 mm black anodized | Heatsink Fischer Elektronik SK 526 30 mm black anodized                                             |
| 28. | HS2        | SK 525 20 mm black anodized | Heatsink Fischer Elektronik SK 525 20 mm black anodized                                             |
| 29. | IC1        | NCV1362AA                   | Automotive Primary Side Flyback Controller                                                          |
| 30. | L1         | 2.2 mH                      | Fixed Inductors RFB 1010 Lead Rad 2.2 mH 0.41 A 4.1 $\Omega$                                        |


# SECO-HVDCDC1362-40W-GEVB

**Table 1. BILL OF MATERIALS** (continued)

| #   | Designator         | Comment                          | Description                                                                                              |
|-----|--------------------|----------------------------------|----------------------------------------------------------------------------------------------------------|
| 31. | L2                 | 470 $\mu$ H                      | Fixed Inductors RFB 1010 Lead Rad 470 $\mu$ H 0.9 A 0.81 $\Omega$                                        |
| 32. | Q1                 | NSVBC817-40W                     | General purpose NPN transistor 45 V 500 mA <b>onsemi</b>                                                 |
| 33. | Q3                 | NVHL160N120SC1                   | SiC NMOS 1200V 17A 160 m $\Omega$ <b>onsemi</b>                                                          |
| 34. | R1                 | 68R                              | SMD thick film resistor 68R 1206 1% 660 mW Panasonic                                                     |
| 35. | R3                 | 6M8                              | High Ohmic / High Voltage Metal Glaze Leaded Resistors 0207 6M8 5% 250 mW Vishay                         |
| 36. | R4                 | 10M                              | High Ohmic / High Voltage Metal Glaze Leaded Resistors 0207 10M 5% 250 mW Vishay                         |
| 37. | R5, R6, R9         | 100k                             | SMD Chip Resistor, 100 k $\Omega$ , MCWR Series, 200 V, Thick Film, 1206 [3216 Metric], 250 mW Multicomp |
| 38. | R10, R19           | 0R                               | SMD Chip Resistor, 0 $\Omega$ , ERJ8G Series, 200 V, Thick Film, 1206 [3216 Metric], 250 mW Panasonic    |
| 39. | R13                | 4k7                              | SMD thick film resistor 4k7 0603 1% 100 mW Panasonic                                                     |
| 40. | R17                | 154k                             | SMD thick film resistor 154k 0805 1% 125 mW Panasonic                                                    |
| 41. | R24                | 270k                             | SMD thick film resistor 270k 0603 1% 100 mW Panasonic                                                    |
| 42. | R25                | 10k                              | SMD thick film resistor 10k 0805 1% 125 mW Panasonic                                                     |
| 43. | R26                | 8R2                              | SMD thick film resistor 8 $\Omega$ 1206 1% 500 mW Panasonic                                              |
| 44. | R28                | 1k                               | SMD thick film resistor 1k 1206 1% 250 mW Panasonic                                                      |
| 45. | R29                | 100k                             | SMD Thermistor, 100 k $\Omega$ , NTCG-S Series, 0805 [2012 Metric], 200 mW TDK                           |
| 46. | R30                | 34k8                             | SMD thick film resistor 34k8 0603 1% 100 mW Panasonic                                                    |
| 47. | R31, R32           | 0R56                             | SMD thick film resistor 0.56 $\Omega$ 1206 1% 500 mW Panasonic                                           |
| 48. | R33                | 51k1                             | SMD thick film resistor 51k1 0603 1% 100 mW Panasonic                                                    |
| 49. | R34                | 44k2                             | SMD thick film resistor 44k2 0603 1% 100 mW Panasonic                                                    |
| 50. | SB1, SB2, SB3, SB4 | Plastic spacer M3 M/F 8/5 HEX6   | Plastic spacer internal/external M3x8 thread, 5 mm Würth Elektronik                                      |
| 51. | ST1, ST2, ST3, ST4 | Plastic spacer M3 F/F 10/40 HEX6 | Plastic spacer internal/internal M3x6 thread, 40 mm Würth Elektronik                                     |
| 52. | T1                 | 750319105                        | Transformer for DC-DC (NCV1362 flyback 250V-900VDC@40W) converter from Würth Elektronik                  |
| 53. | TP1                | ORANGE                           | PTH testpoint eyelet 3.2mm orange Keystone Electronics                                                   |
| 54. | TP2, TP5           | RED                              | PTH testpoint eyelet 3.2mm red Keystone Electronics                                                      |
| 55. | TP3                | BROWN                            | PTH testpoint eyelet 3.2mm brown Keystone Electronics                                                    |
| 56. | TP4                | BLUE                             | PTH testpoint eyelet 3.2mm blue Keystone Electronics                                                     |
| 57. | TP6                | BLACK                            | PTH testpoint eyelet 3.2mm black Keystone Electronics                                                    |
| 58. | W1                 | AOS247 23x20x1                   | Ceramic insulation washer without hole for TO247 1mm Fischer Elektronik                                  |

# SECO-HVDCDC1362-40W-GEVB

## Layout

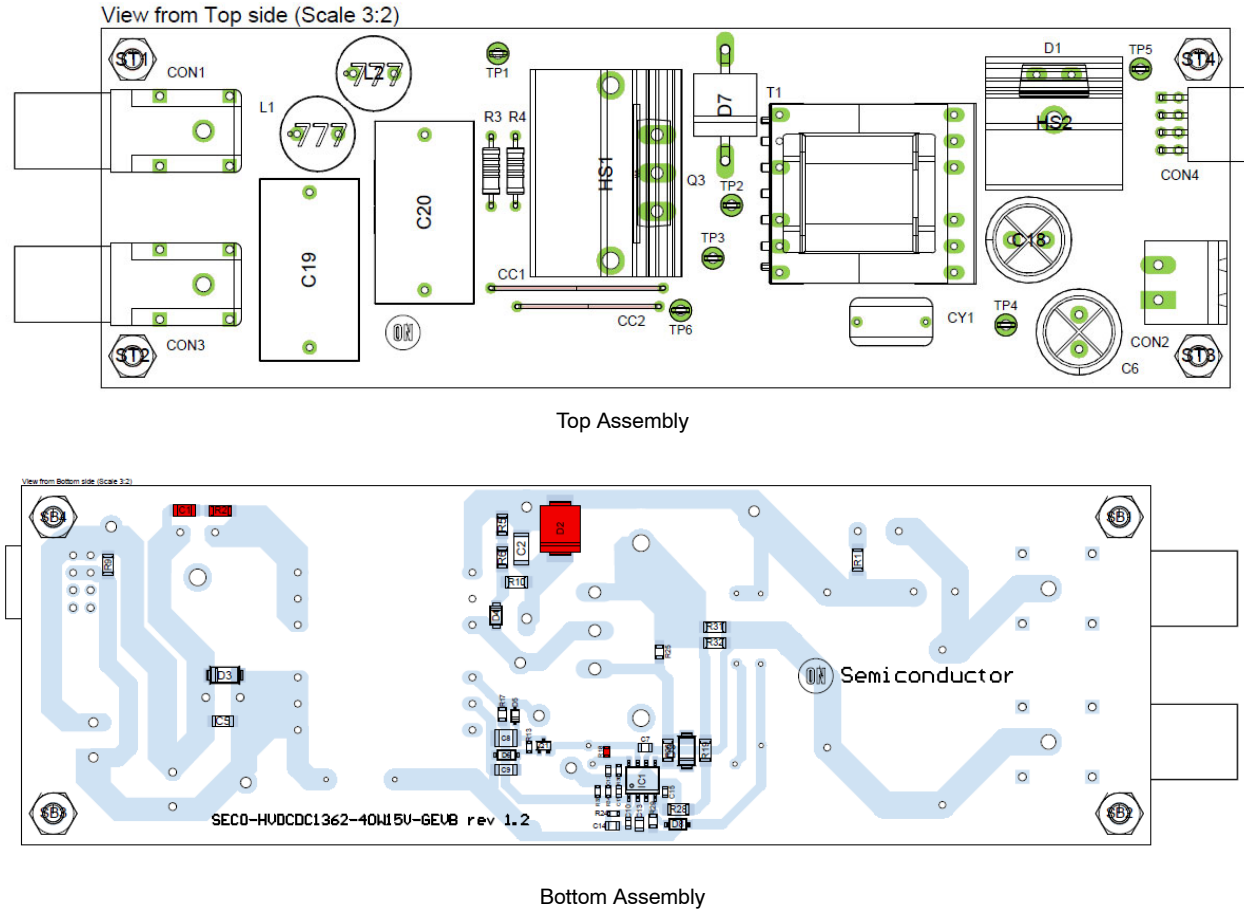

**Figure 22. Layout**

## References

- NCV1362 Data sheet
- NCV1362 Application notes
- NCV1362 [Evaluation boards](#)
- NCV1362 Design worksheet MathCad

## SECO-HVDCDC1362-40W-GEVB

### REVISION HISTORY

| Revision | Description of Changes                                                                                                                 | Date      |
|----------|----------------------------------------------------------------------------------------------------------------------------------------|-----------|
| 0        | Initial document version release.                                                                                                      | 10/8/2020 |
| 1        | Update – p1 (GEVB number (OPN) below title and in the Introduction, Link in Collateral), p15 (link in Development Resources and Tools) | 6/2/2021  |
| 2        | Update – NCV1362BA changed to NCV1362AA in Table 1 (p.15) and in Figure 4 (p.4), Rebranding to <b>onsemi</b>                           | 7/9/2025  |

**onsemi**, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

**THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.**

**onsemi** reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

**onsemi** products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

**FCC WARNING** – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

**onsemi** does not convey any license under its patent rights nor the rights of others.

**LIMITATIONS OF LIABILITY:** **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit [www.onsemi.com](http://www.onsemi.com).

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)