


SPEC:

COMPLIANT RoHS DIRECTIVE 2011/65/UE

MATERIAL	FR4 IMPROVED (low CTE)		
BOARD THICKNESS		1.6mm /63mils	
STACKUP	SF /1LAYERS		
MINIMAL GAP		210um /8.0mils	
MINIMAL SLIVER		210um /8.0mils	
COPPER THICKNESS		70um(2oz)at START	
FINISH THICKNESS	CHEMICAL NiAu		
SOLDER MASK		GREEN BOT	
SILKSCREEN	WHITE TOP&BOT		
ALL BOARD ELECTRICALLY TESTED			
MANUFACTURE 'S LOGO & DATECODE MARKED ON BOTTOM SOLDERMASK			

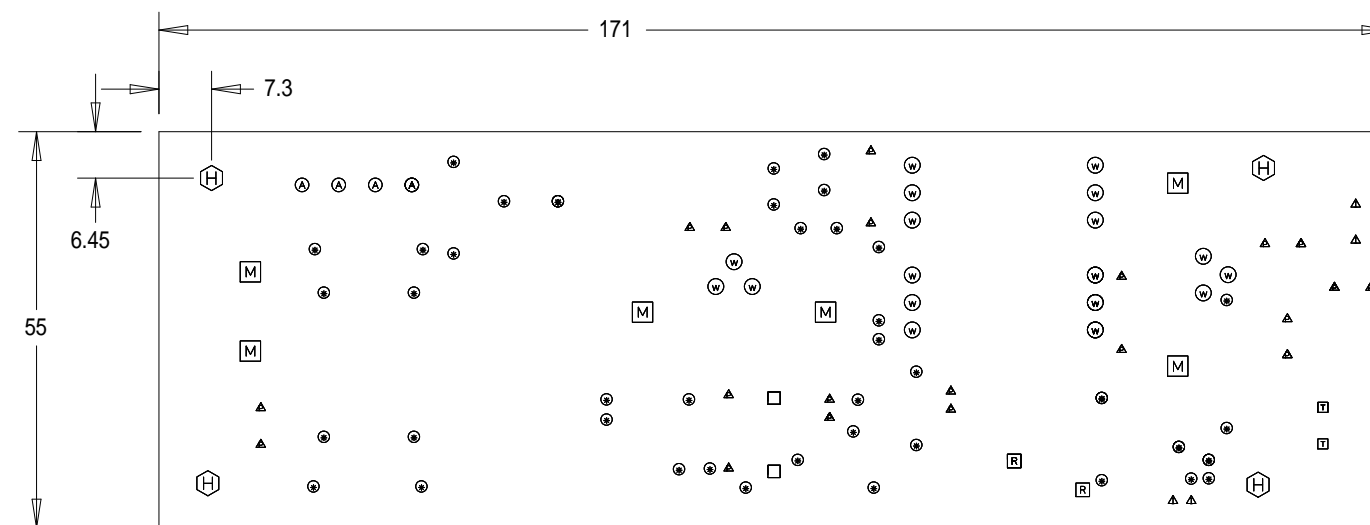

DRILL CHART: TOP to BOTTOM

ALL UNITS ARE IN MILLIMETERS

FIGURE	SIZE	PLATED	QTY
▲	0.8		20
▲	0.9		4
⊙	1.0		41
□	1.1		2
⊞	1.2		2
⊞	1.4		2
⊙	1.65		18
⊙	1.9		4
⊞	2.8		6
⊞	4.0		4

2.0	W49/2014 W27/2014	
indice	Description	Date
Controle par :		Autorise par:
Definition CUT DRILL DRAWING PLAN PRECAGE DETOURAGE		
Subc. DYPE TECH		Dessine: e B
Board: EVb NCP1239		Echelle: 1/1
CE DOCUMENT EST LA PROPRIETE DE ON semiconductor IL NE PEUT ETRE UTILISER, REPRODUIT OU COMMUNIQUER SANS SONT AUTHORISATION		Pages: 1/3
THIS DOCUMENT IS ON semiconductor PROPERTY, IT MAY NOT BE USED, REPRODUCED OR TRANSMITTED WITHOUT THEIR APPROVAL.		Format: A3