

NCP51705 Mini Evaluation Board User's Manual

NCP51705 SiC Driver Evaluation Board for Existing or New PCB Designs



ON Semiconductor®

www.onsemi.com

INTRODUCTION

Purpose

This document describes the use and applications for the NCP51705 SiC driver mini EVB. The EVB is designed on a four layer PCB and includes the NCP51705 driver and all the necessary drive circuitry. The EVB also includes an on-board digital isolator and the ability to solder any MOSFET or SiC MOSFET in a T0247 high voltage package. The EVB does not include a power stage and is generic from the point of view that it is not dedicated to any particular topology. It can be used in any low-side or high-side power switching application. For bridge configurations two or more of these EVBs can be configured in a totem pole type drive configuration. The EVB can be considered as an isolator+driver+T0247 discrete module.

NCP51705 Description

The NCP51705 driver is designed to primarily drive SiC MOSFET transistors. To achieve the lowest possible

conduction losses, the driver is capable of delivering the maximum allowable gate voltage to the SiC MOSFET device. By providing high peak current during turn-on and turn-off, switching losses are also minimized. For improved reliability, dV/dt immunity and even faster turn-off, the NCP51705 can utilize its on-board charge pump to generate a user selectable negative voltage rail.

For full compatibility and to minimize the complexity of the bias solution in isolated gate drive applications the NCP51705 also provides an externally accessible 5V rail to power the secondary side of digital or high speed opto isolators.

The NCP51705 offers important protection functions such as under-voltage lockout monitoring for the bias power and thermal shutdown based on the junction temperature of the driver circuit.

EVAL BOARD USER'S MANUAL

NCP51705 Block Diagram

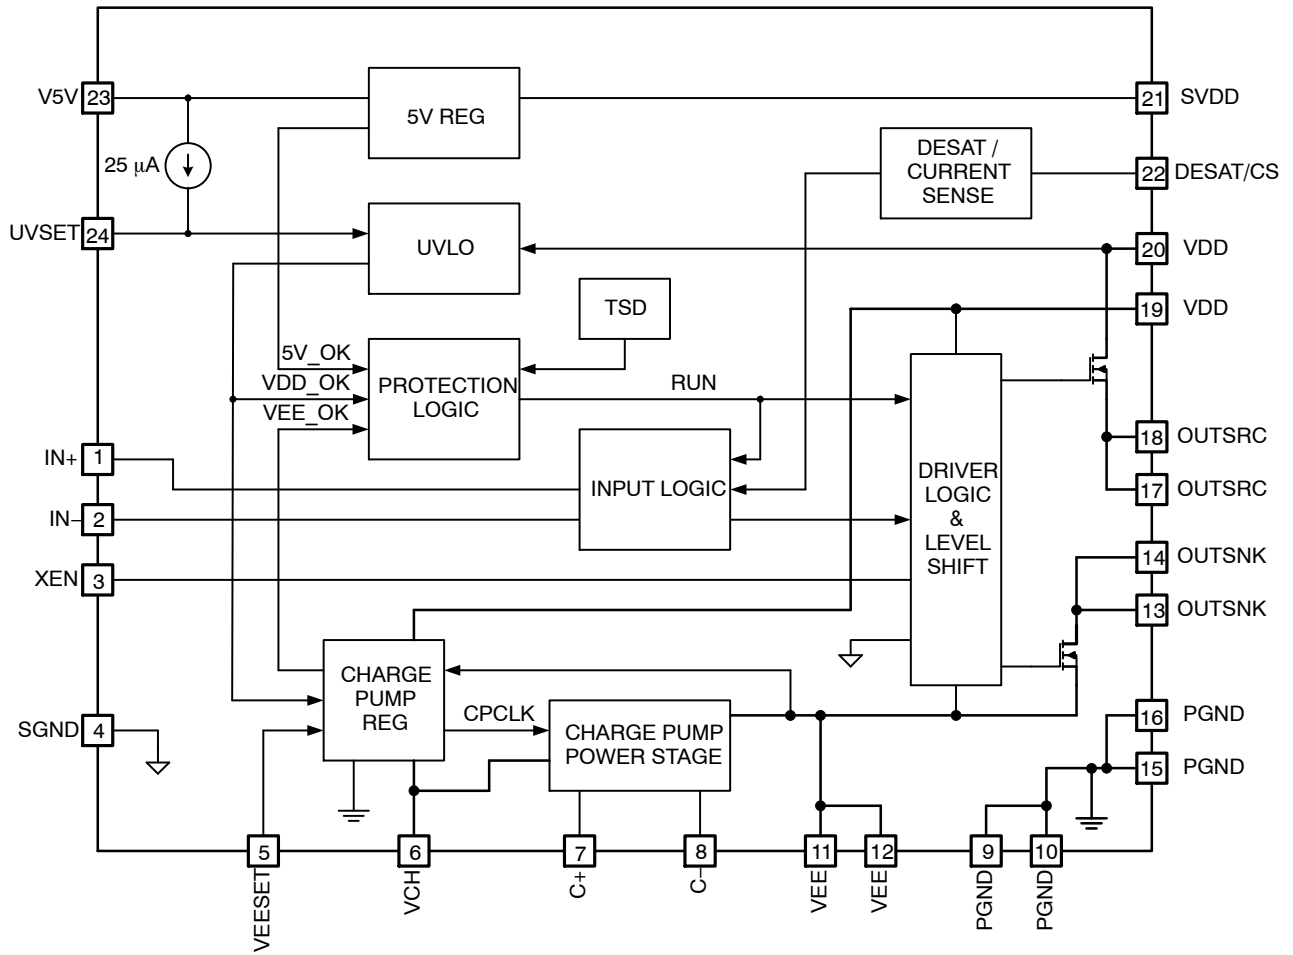


Figure 1. NCP51705 Functional Block Diagram

SUMMARY OF EVB

EVB Photos

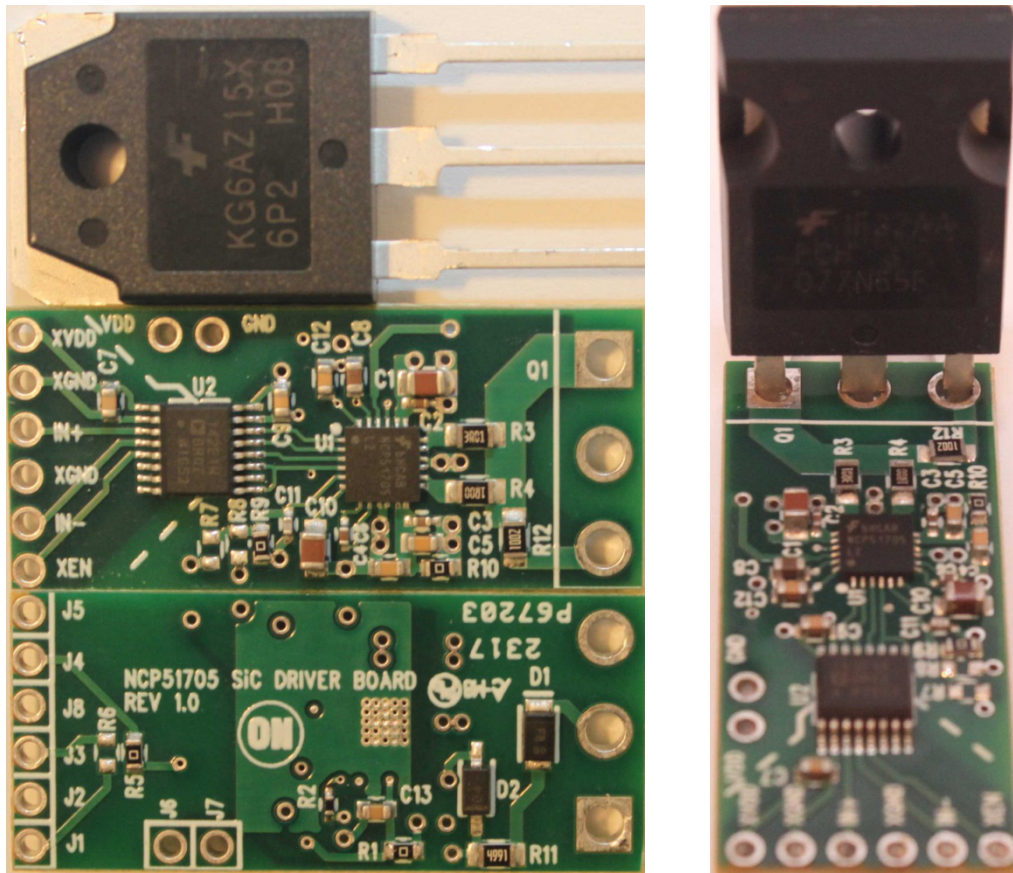


Figure 2. NCP51705 EVB (35 mm x 15 mm x 5 mm) – Top and Bottom View (T0-247 Shown for Scale)

EVBUM2528/D

EVB Schematic

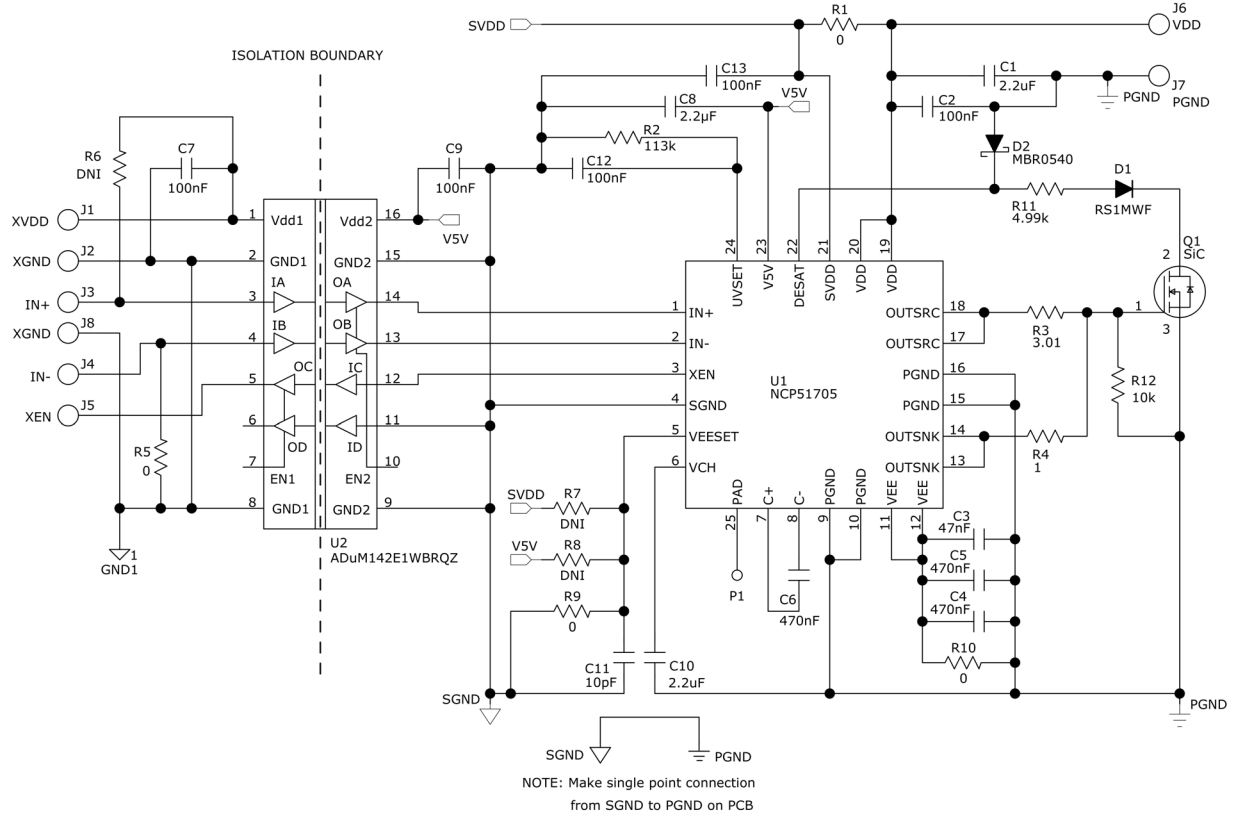


Figure 3. NCP51705 EVB Schematic

Table 1. BILL OF MATERIALS

Item	Qty	Reference	Value	Part Number	Description	Manufacturer	Pkg Type
1	2	C1 C10	2.2 μ F	CGA4J3X7R1H225M125AE	CAP, SMD, CERAMIC, 50 V, X7R	STD	805
2	2	C2 C13	100 nF	C1005X7R1H104M050BE	CAP, SMD, CERAMIC, 50 V, X7R	STD	402
3	1	C3	47 nF	GRM155R71E473KA88D	CAP, SMD, CERAMIC, 25 V, X7R	STD	402
4	2	C4–5	470 nF	GRM188R71E474KA12D	CAP, SMD, CERAMIC, 25 V, X7R	STD	603
5	1	C6	470 nF	C1005X5R1E474K050BB	CAP, SMD, CERAMIC, 25 V, X5R	STD	402
6	3	C7 C9 C12	100 nF	C0603C104K8RACTU	CAP, SMD, CERAMIC, 10 V, X7R	STD	603
7	1	C8	2.2 μ F	LMK107B7225KA–T	CAP, SMD, CERAMIC, 10 V, X7R	STD	603
8	1	C11	10 pF	GRM1555C1H100JA01D	CAP, SMD, CERAMIC, 50 V, NPO	STD	402
9	1	D1		RS1MWF	Diode, Fast, 1 A, 1000 V, Std. Rec.	Vishay	SOD123F
10	1	D2		MBR0540	Diode, Schottky, 40 V, 500 mA, 510 mV	ON Semiconductor	SOD–123
11	1	Q1		DNI	MOSFET, N–CH, 600 V, 20 A, 190 m Ω	ON Semiconductor	TO–247

Table 1. BILL OF MATERIALS

Item	Qty	Reference	Value	Part Number	Description	Manufacturer	Pkg Type
12	4	R1 R5 R9-10	0	RC0603JR-070RL	RES, SMD, 1/10 W	STD	603
13	1	R2	113k	RC0402FR-07200KL	RES, SMD, 1/16 W	STD	402
14	1	R3	3.01	RMCF0805FT3R01	RES, SMD, 1/8 W	STD	805
15	1	R4	1	RMCF0805FT1R00	RES, SMD, 1/8 W	STD	805
16	3	R6-8	DNI		RES, SMD, 1/10 W	STD	603
17	1	R11	4.99k	RC0805FR-074K99L	RES, SMD, 1/8 W	STD	805
18	1	R12	10k	RC0805FR-0710KL	RES, SMD, 1/8 W	STD	805
19	1	U1		NCP51705	SiC Driver, Single, 6 A, Single	ON Semiconductor	WQFN-24
20	1	U2		ADuM142E1WBRQZ	Digital Isolator, RF, 4-Chan- nel	Analog Devices	QSOP-16

PCB Assembly and Layers

Figure 4 through Figure 9 shows the top and bottom assembly and the four-layers of the PCB. The PCB is 35 mm

x 15 mm x 5 mm (length x width x height) where the width of the PCB is approximately the width of a T0-247 body.

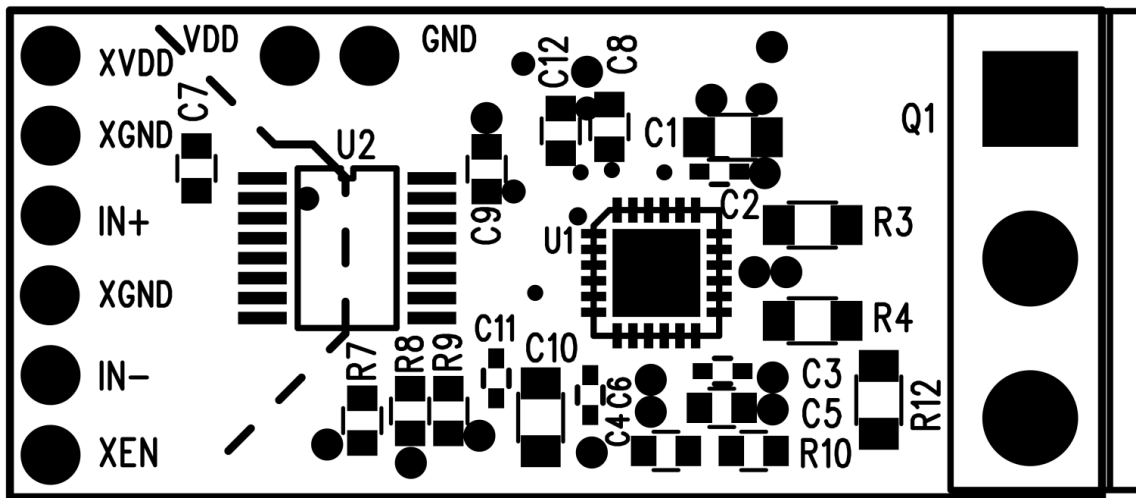


Figure 4. Top Assembly

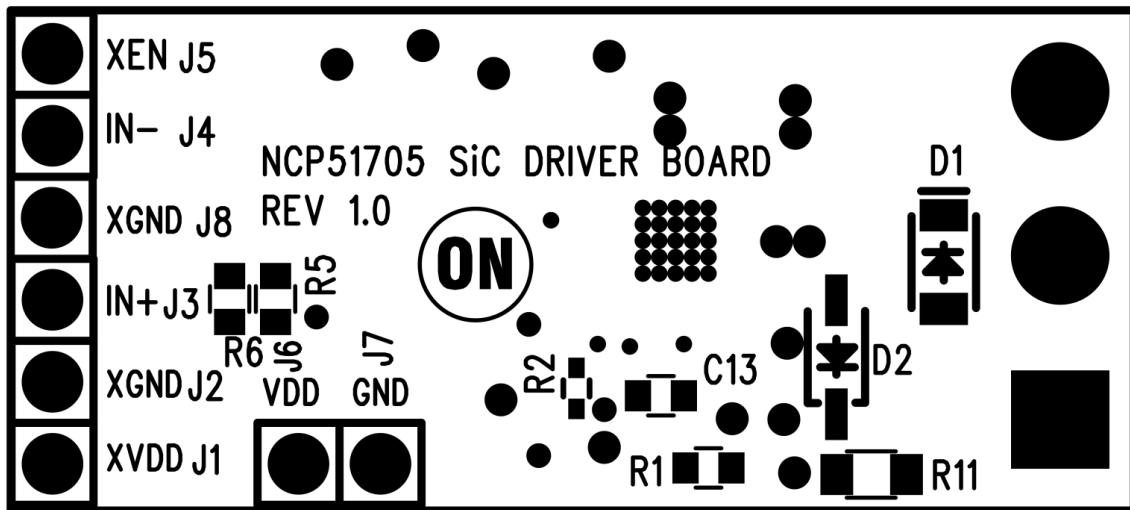


Figure 5. Bottom Assembly

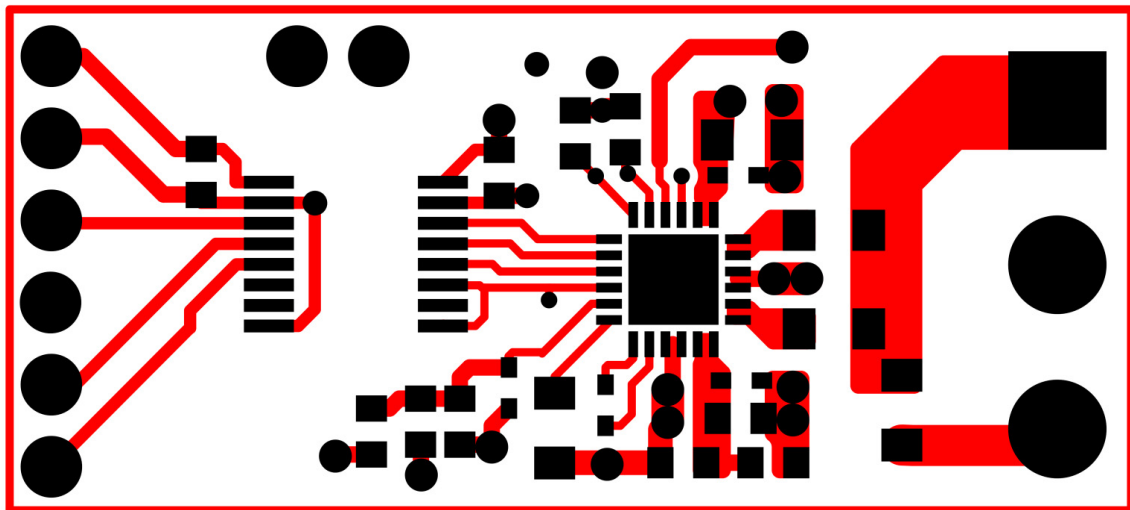


Figure 6. Top Layer

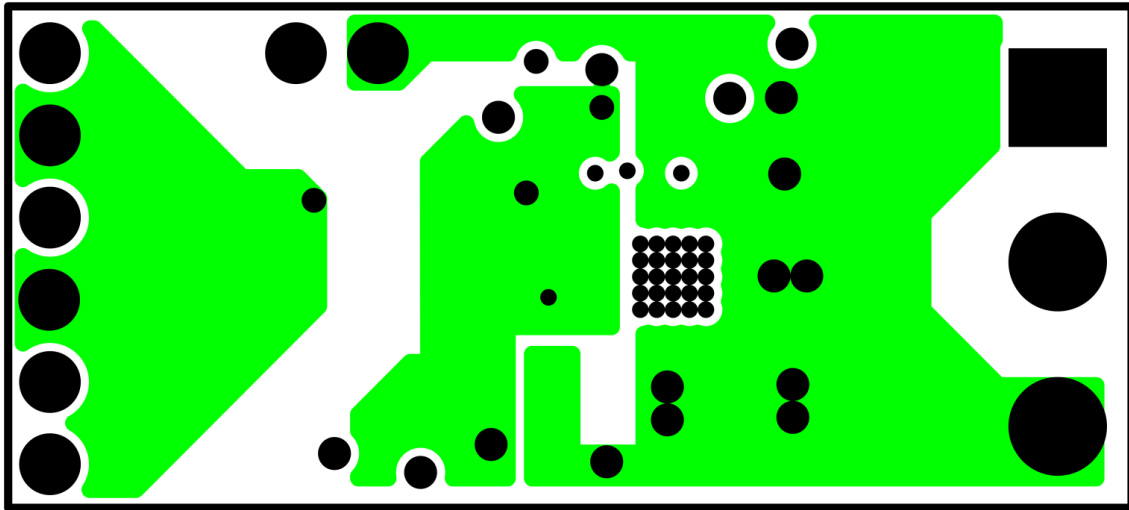


Figure 7. Layer 2

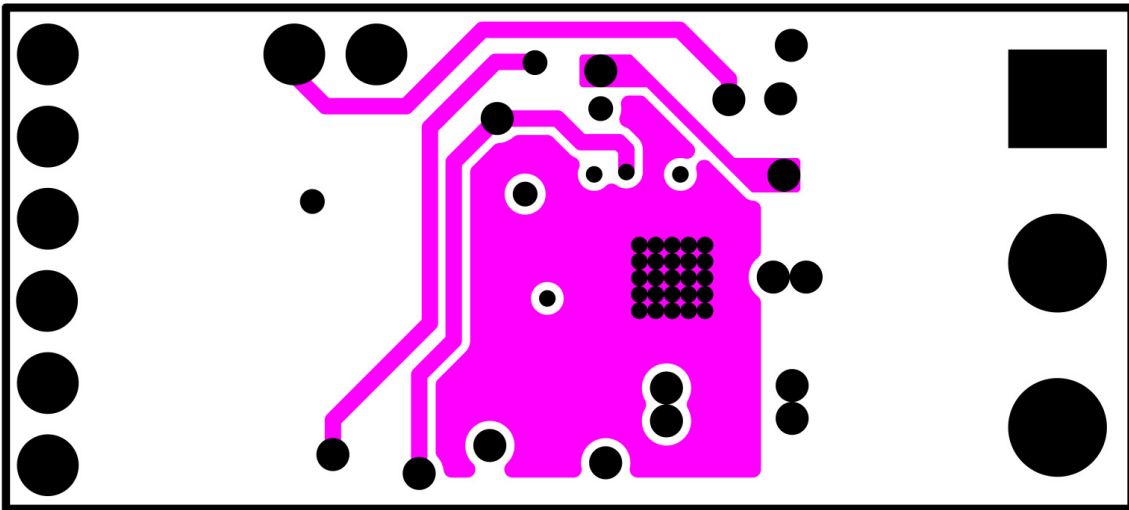


Figure 8. Layer 3

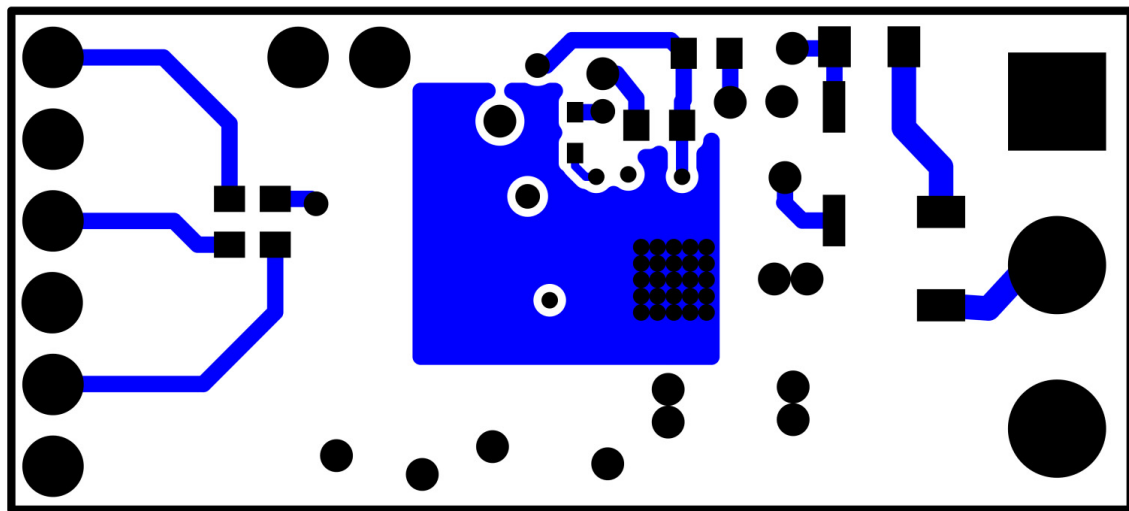


Figure 9. Bottom Layer

I/O Connectors

There are 7 I/O connectors described in Table 2 below. The μ C (or, PWM control IC) output (J3, J4), the XVDD and XGND (J1, J2) and the XEN (J5) signals are noted as “primary” ground referenced. There is no true “primary”

and “secondary” ground but there is 1.5 kV galvanic isolation across the isolation boundary. It is especially important to maintain isolation in high-side, high-voltage, switching applications where the “secondary” VDD (J6, J7) floats VDD volts above the power supply input voltage:

Table 2. I/O CONNECTOR DESCRIPTIONS

Ref Des	Name	I/O	GND Ref	Type	Description	Value (V)
J1	XGND	Input	Primary	Plated Hole	External primary ground from PWM side	0
J2	XVDD	Input	Primary	Plated Hole	External VDD from PWM side (isolator bias)	5 (Note 1)
J3	IN+	Input	Primary	Plated Hole	Non-inverting, PWM input	$3.3 < V_{IN+} < 5$ (Note 1)
J4	IN-	Input	Primary	Plated Hole	Inverting PWM input	$3.3 < V_{IN-} < 5$ (Note 1)
J5	XEN	Output	Primary	Plated Hole	XEN fault flag or sync signal from NCP51705	5
J6	VDD	Input	Secondary	Plated Hole	NCP51705 VDD	<20
J7	GND	Input	Secondary	Plated Hole	NCP51705 secondary ground	0
J8	XGND	Input	Primary	Plated Hole	External primary ground from PWM side	0

1. The digital isolator, U2, requires that the amplitude of the PWM input (IN+ or IN-) be equal to VDD (XVDD) and less than or equal to 5 V.

EVB INSTALL CONFIGURATIONS

Mounting into Existing PCB – Option 1

The NCP51705, SiC Driver Mini EVB can be mounted into an existing power board, shown as “Main PCB” in Figure 10. If there are no components or low profile surface mount components only, the mini EVB can be mounted parallel to the main PCB as shown in Figure 10. The T0–247, SiC MOSFET leads would pass through the mini EVB

plated thru-holes and into the main PCB. Or, if necessary, the gate lead of the T0–247, SiC MOSFET can be soldered to the plated thru-hole on the mini EVB and cut so that it does not contact the main PCB, as shown in the dotted box in Figure 10. For mechanical strength, it is preferred that the T0–247 gate lead pass through both PCB’s.

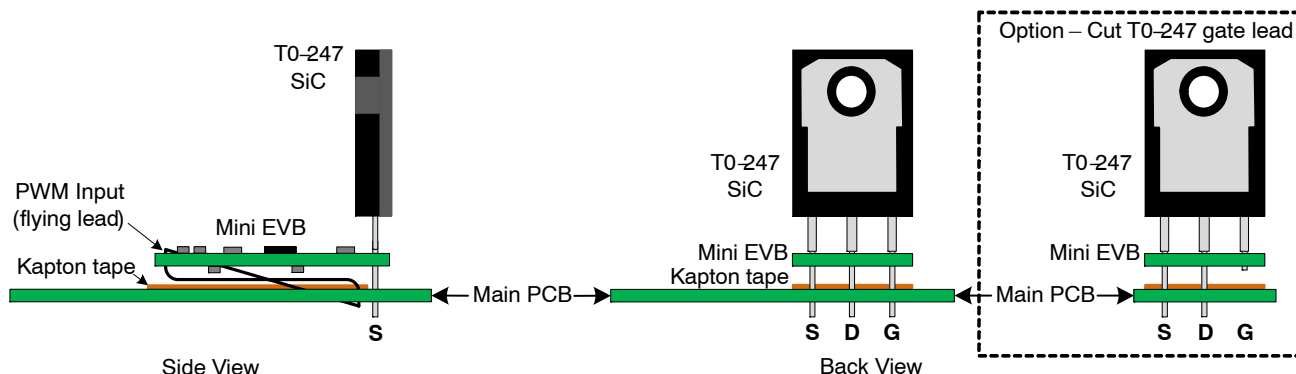


Figure 10. Mini EVB Installation – Option 1

Recommended Procedure for Option 1 Mounting into an Existing PCB

1. On the main PCB, isolate the gate drive to the T0–247 SiC MOSFET. If the existing design includes a gate drive resistor, removing it should serve the purpose of isolating the gate drive to the T0–247. If there is no series component between the PWM signal source and the T0–247 gate lead, the gate drive PCB track will need to be cut.
2. Measure the resistance between the PWM source and the T0–247 gate lead (or PWM source to gate drive transformer/isolator if applicable). Verify reading is high impedance (open).
3. If a T0–247 discrete is installed in the main PCB, remove it now.
4. Place Kapton or non-conductive tape over the main PCB area directly beneath the mini EVB. This is to avoid the possibility of having any components on the bottom of the mini EVB touch components or conductive surfaces on the main PCB.
5. Solder a flying lead of bus wire to the main PCB, PWM signal. Make sure there is enough length of the PWM input (flying lead) to reach through the mini EVB plated thru-hole (J3 or J4)
6. For non-inverting PWM input logic, verify that R5 (0 Ω) is installed and R6 is removed. This is the correct configuration of the mini EVB for non-inverting PWM input logic.

7. For inverting PWM input logic, verify that R6 (0 Ω) is installed and R5 is removed. This is the correct configuration of the mini EVB for inverting PWM input logic.
8. Solder the T0–247 through just the mini EVB first
9. With the T0–247 installed into the mini EVB, install and solder the T0–247 leads into the main PCB
10. Solder the other end of the PWM input (flying lead) to IN+ (J3) for non-inverting PWM applications or IN– (J4) for inverting PWM applications.
11. Using the same size bus wire, solder the remaining connections between J1, J2, J5 and J8 of the mini EVB to the appropriate locations on the main PCB.
12. Solder flying leads from J6–7 for bias voltage to the NCP51705. Note that J6–7 are across the isolation boundary from J1–5 and J8.

Mounting into Existing PCB – Option 2

If components mounted on the main PCB interfere with mounting the mini EVB as described by Option 1 (Figure 10), the T0–247 leads can be formed (lead length may need to be added) with the mini EVB mounted perpendicular to the main PCB as shown in Figure 11, option 2. If required, both mounting options allow the application of a heat sink to the T0–247 package. If high dV/dt is present on the drain of the T0–247, the EVB should be angled, away from being parallel to the T0–247, as much as possible.

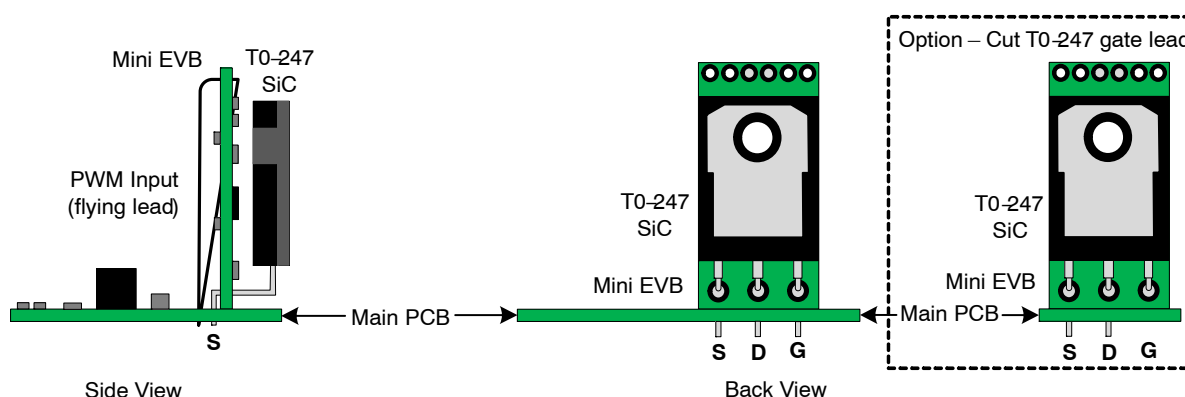


Figure 11. Mini EVB Installation – Option 2

Recommended Procedure for Option 2 Mounting into an Existing PCB

1. On the main PCB, isolate the gate drive to the T0-247 SiC MOSFET. If the existing design includes a gate drive resistor, removing it should serve the purpose of isolating the gate drive to the T0-247. If there is no series component between the PWM signal source and the T0-247 gate lead, the gate drive PCB track will need to be cut.
2. Measure the resistance between the PWM source and the T0-247 gate lead (or PWM source to gate drive transformer/isolator if applicable). Verify reading is high impedance (open).
3. If a T0-247 discrete is installed in the main PCB, remove it now.
4. Solder a flying lead of bus wire to the main PCB, PWM signal. Make sure there is enough length of the PWM input (flying lead) to reach through the mini EVB plated thru-hole (J3 or J4)
5. For non-inverting PWM input logic, verify that R5 (0 Ω) is installed and R6 is removed. This is the correct configuration of the mini EVB for non-inverting PWM input logic.
6. For inverting PWM input logic, verify that R6 (0 Ω) is installed and R5 is removed. This is the correct configuration of the mini EVB for inverting PWM input logic.
7. Make appropriate modifications to lead form the T0-247 leads as shown in Figure 11. If the T0-247 leads are not long enough to provide sufficient clearance between the mini EVB and T0-247 case and allow the leads to pass through the mini EVB and down through the main PCB, then extending the lead length may be necessary.
8. After the T0-247 leads have been formed, check for fit through the mini EVB and down into the main PCB

9. Solder the T0-247 through just the mini EVB first
10. With the T0-247 installed into the mini EVB, install and solder the T0-247 leads into the main PCB
11. Solder the other end of the PWM input (flying lead) to IN+ (J3) for non-inverting PWM applications or IN- (J4) for inverting PWM applications.
12. Using the same size bus wire, solder the remaining connections between J1, J2, J5 and J8 of the mini EVB to the appropriate locations on the main PCB.
13. Solder flying leads from J6-7 for bias voltage to the NCP51705. Note that J6-7 are across the isolation boundary from J1-5 and J8.

Mounting into New PCB Design

The NCP51705, SiC Driver Mini EVB can also be used as an isolator+driver+T0-247 “driver module” that can be integrated into a new PCB design. The gate lead of the T0-247 between the mini EVB and the main PCB is for mechanical strength only. For main PCB layout, the gate lead extends down through the main PCB and can be soldered to an isolated plated thru-hole. As shown in Figure 12, shoulder pins with appropriate flange are one option that can be used as mounting pins between J1-8 of the mini EVB and the main PCB. Another option, shown in Figure 13, is to use a 100 mil center on center header which is a row of pins through a plastic header. The plastic header is used as a standoff for setting the mounting height between the mini EVB and the main PCB. The hole pattern for building a schematic library decal of the driver module is shown in Figure 14.

EVBUM2528/D

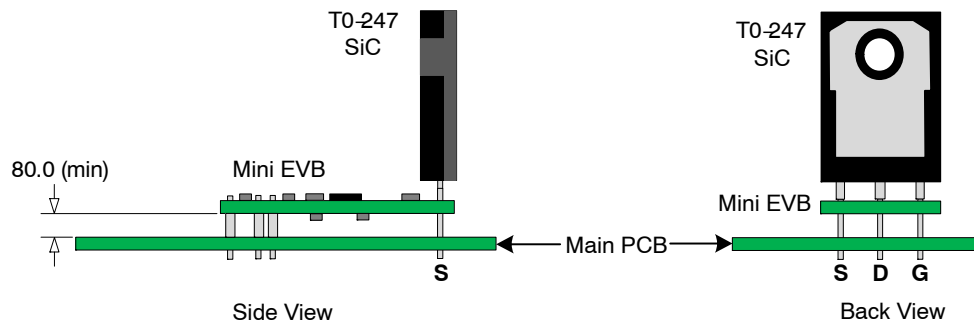


Figure 12. New PCB Design using Shoulder Pins (80 mil minimum mounting height)

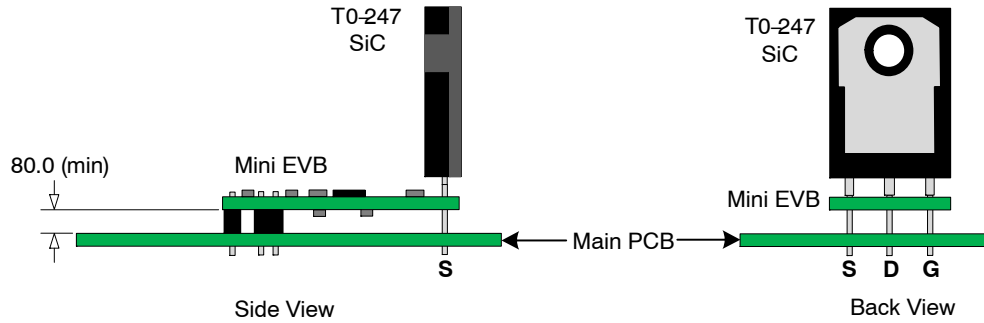


Figure 13. New PCB Design using 100 mil Interconnect Header Pins (80 mil minimum mounting height)

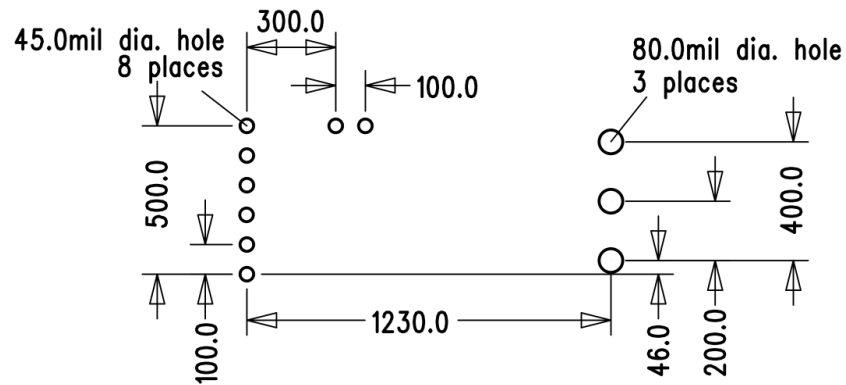


Figure 14. NCP51705 SiC Driver Mini EVB PCB Hole Pattern (All Dimensions in mils)

TESTING WITHOUT INSTALLING INTO A PCB

The NCP51705, SiC Driver Mini EVB can also be tested without installing into a main PCB. However, since this EVB was designed for small form factor there are no test points included for connecting voltage probes. The EVB should be hand probed carefully since the components are very fine pitch or flying leads connected to desired probe points can be attached. Note that the IN+/IN- PWM amplitude must be equal to the XVDD (5 V). The 20 V DC bias (VDD and GND) is on the secondary side of the digital isolator and therefore has a separate/isolated return ground

from the 5 V DC bias (XVDD and XGND). The recommended series load of 470 pF and 4.99 Ω is close to what might be representative of a SiC gate drive input impedance. Leaded passive components can be soldered into the T0-247 holes as shown in Figure 15. Alternatively, a T0-247 SiC MOSFET can also be soldered in place for Q1 and used as a load for the NCP51705. Note that testing without installing into a power stage, leaves the DESAT pin open since there is no active drain signal. The effect of operating DESAT this way is explained in section ‘DESAT’.

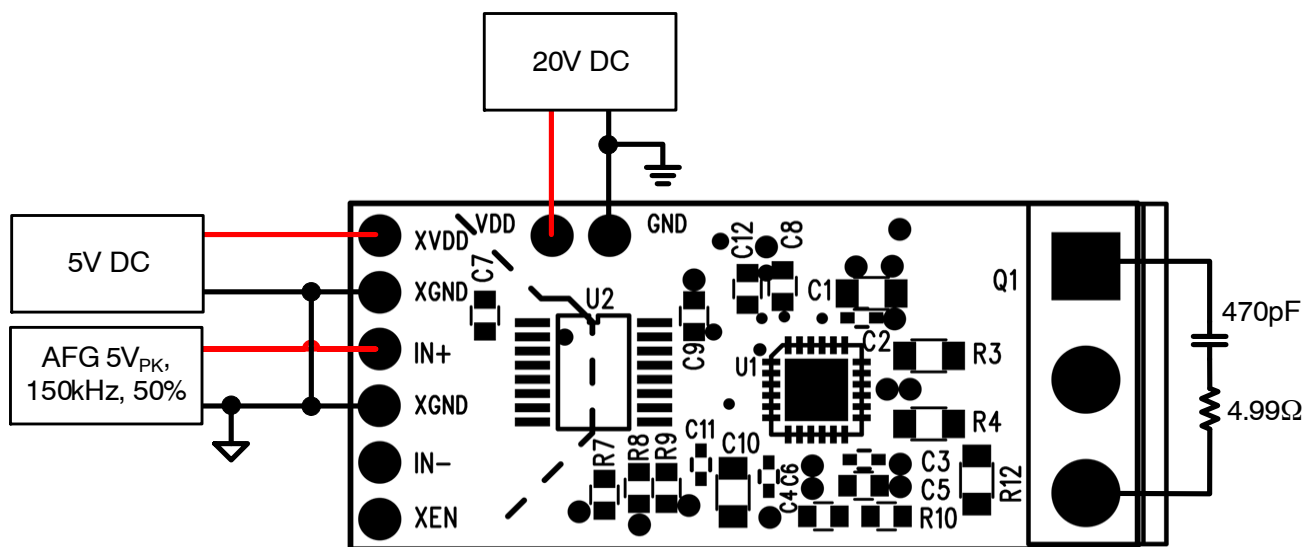


Figure 15. Test Configuration of EVB without Installing into Main PCB

Turn-on Procedure

1. Apply XVDD = 5 V (Voltage for primary side of the digital isolator, U2)
2. Apply VDD = 20 V (VDD bias voltage for the NCP5170, SiC driver, Note: $UVLO_{ON} = 17$ V)
3. Apply IN+=5V_{PK}, 150 kHz, 50% (Reducing the frequency to less than ~90 kHz will show DESAT active as described in section ‘DESAT’)

VEE

The EVB is preconfigured for VEE=0V. Operating the EVB this way will result in switching between $0V < OUT < VDD$. Several other options for negative VEE

configuration are easily set by removing/installing resistors according to Table 3. Note that R10 must be removed for any VEE configuration other than 0 V. VDD_{UVLO} is programmable by the UVSET resistor as described in section ‘UVSET’ but VEE_{UVLO} is fixed at 80% of the VEE regulate value. If desired, the NCP5170 internal VEE charge pump can be disabled and an external negative voltage can be applied to VEE. When providing VEE from an external negative voltage supply, it is recommended to apply VEE prior to VDD. Any time the internal VEE charge pump is disabled ($VEESET = 0$ V), VEE_{UVLO} is disabled and is therefore shown as “NA” in Table 3.

Table 3. VEESET CONFIGURATION OPTIONS

VEESET	COMMENT	VEE	VEE _{UVLO}
VDD	Install R7 = 0 Ω , Remove R8, R9, R10 $9V < VEESET < VDD$	-8 V	-6.4 V
V5V	Install R7 = 0 Ω , Remove R7, R9, R10	-5 V	-4 V
OPEN	Remove R7, R8, R9, R10	-3 V	-2.4 V
GND	Install R9 = R10 = 0 Ω , Remove R7, R8	0 V	NA
GND	Remove R7, R8, R9, R10. Apply negative external voltage within the range of $-8V < V_{EXT} < 0V$	-V _{EXT}	NA

UVSET

The UVSET function is set by R2 and determines the UVLO turn-on threshold. The EVB is preconfigured with R2 = 113 kΩ which equates to UVLO turn-on (V_{ON}) of ~17 V. The UVLO turn-on threshold can be changed by selecting R2 according to a desired UVLO turn-on threshold, V_{ON}:

$$R_2 = \frac{V_{ON}}{6 \times 25\mu A} \quad (\text{eq. 1})$$

DESAT

DESAT is a type of over-current protection dedicated to monitoring the I_{DX}R_{DS} of the SiC MOSFET. The EVB is preconfigured with R11 = 4.99 kΩ (DESAT resistor). The

internal DESAT threshold is fixed at V_{DESAT(TH)}=7.5V and the DESAT signal amplitude is adjustable by R11. R11 = 4.99 kΩ may not be the correct resistor value for some applications. If V_{DESAT} > 7.5 V during normal operation, decrease R11 to lower the signal amplitude. If DESAT is active, the trailing edge of the OUT pulse is terminated or reduced with respect to the input pulse (IN+). The waveforms shown in Figure 16, show V_{DESAT} < 7.5 V during normal, 80 kHz, operation. Since DESAT is operating with no load, the amplitude is varied by varying the IN+ frequency. Figure 17 shows IN+ increased to 150 kHz and V_{DESAT} = 7.5 V. The trailing edge of OUT is clearly terminated compared to IN+ indicating that DESAT is active.

WAVEFORMS

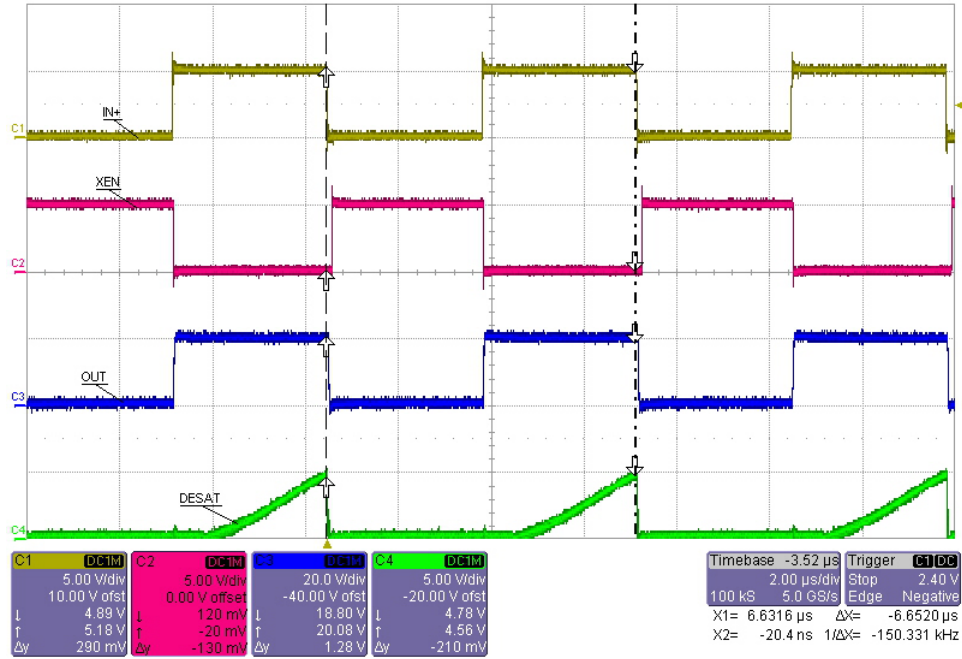


Figure 16. IN+ = 150 kHz, 50%, VDESAT = 5 V, DESAT Inactive

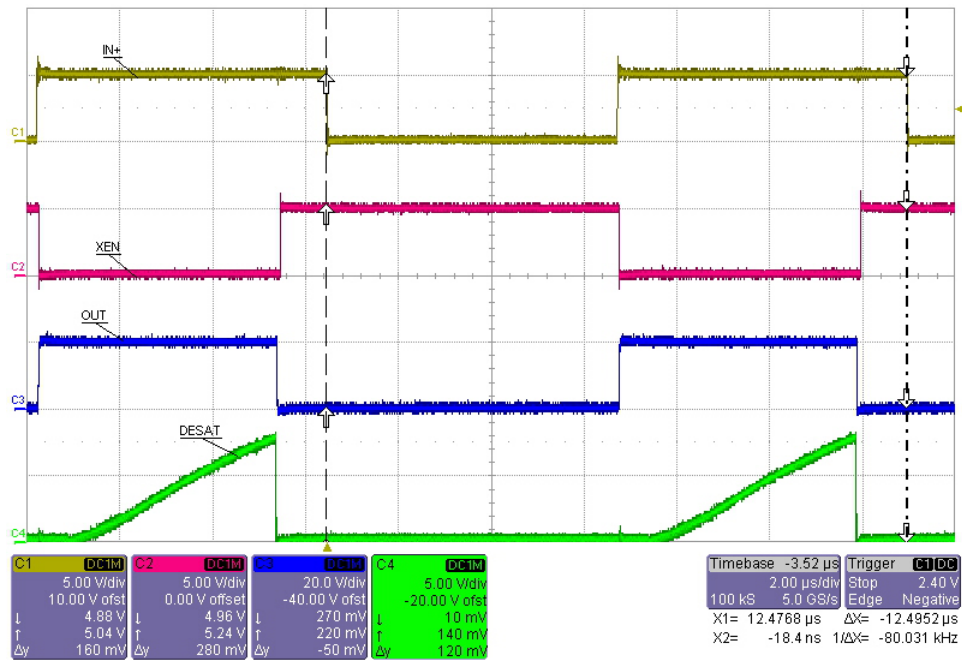


Figure 17. IN+ = 80 kHz, 50%, VDESAT = 7.5 V, DESAT Active

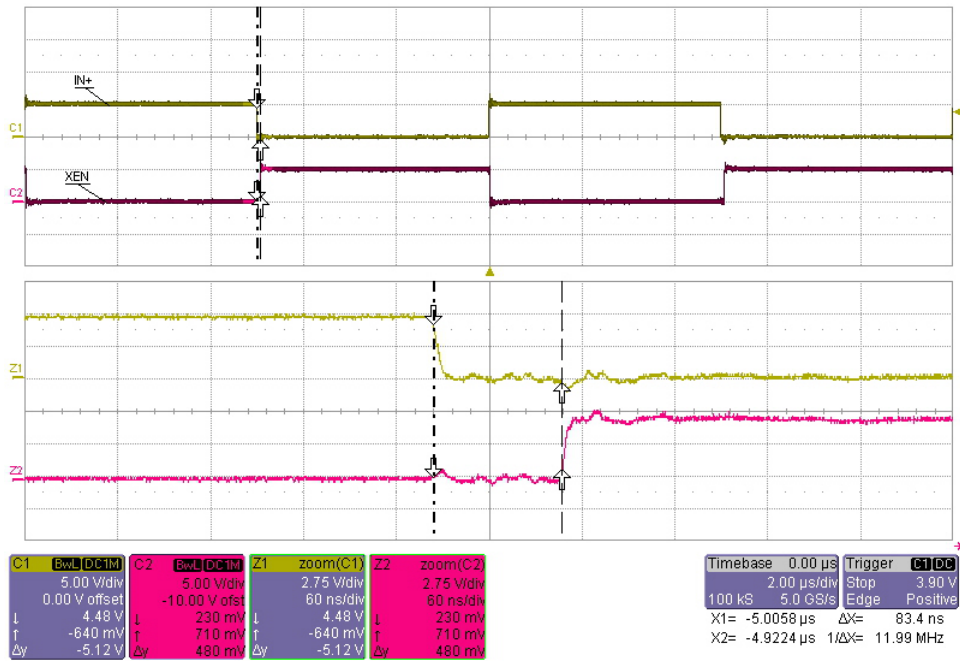


Figure 18. IN+ Falling to XEN Rising Delay, $t_{D1} = 83 \text{ ns}$

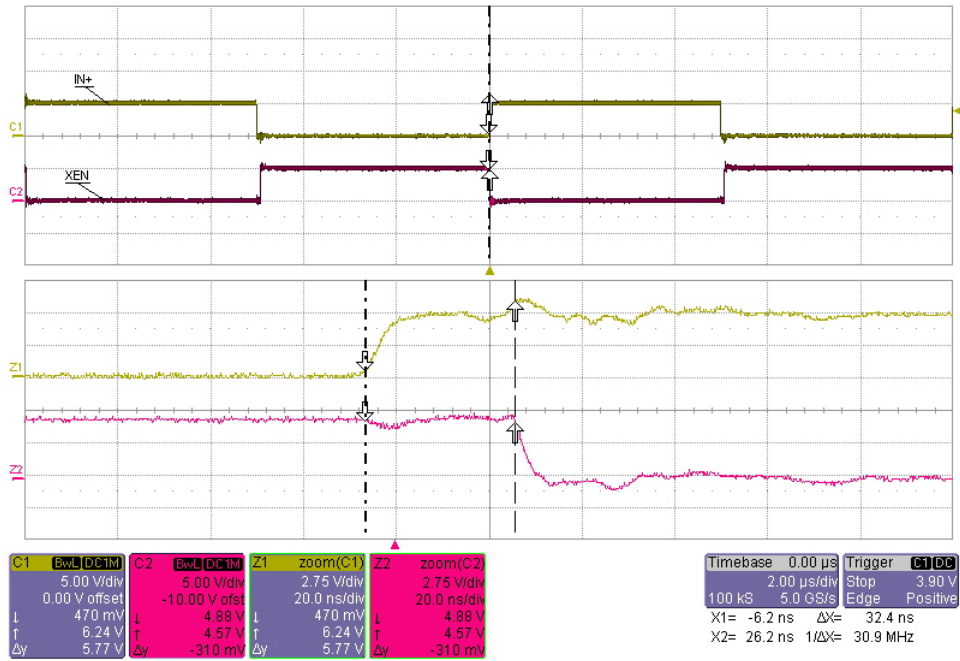


Figure 19. IN+ Rising to XEN Falling Delay, $t_{D2} = 34 \text{ ns}$

onsemi, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.

onsemi reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

onsemi products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

onsemi does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit www.onsemi.com.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales